




SOLAR PV MODULES

NO. 96, Chang'an Street, Airport Economy Zone, Zhengzhou, Henan,
China..WhatsApp: +86 185 9550 5568
Email: info@sanopower.com
Web: www.sanopower.com
For the latest information, please mail to info@sanopower.com, thank you!

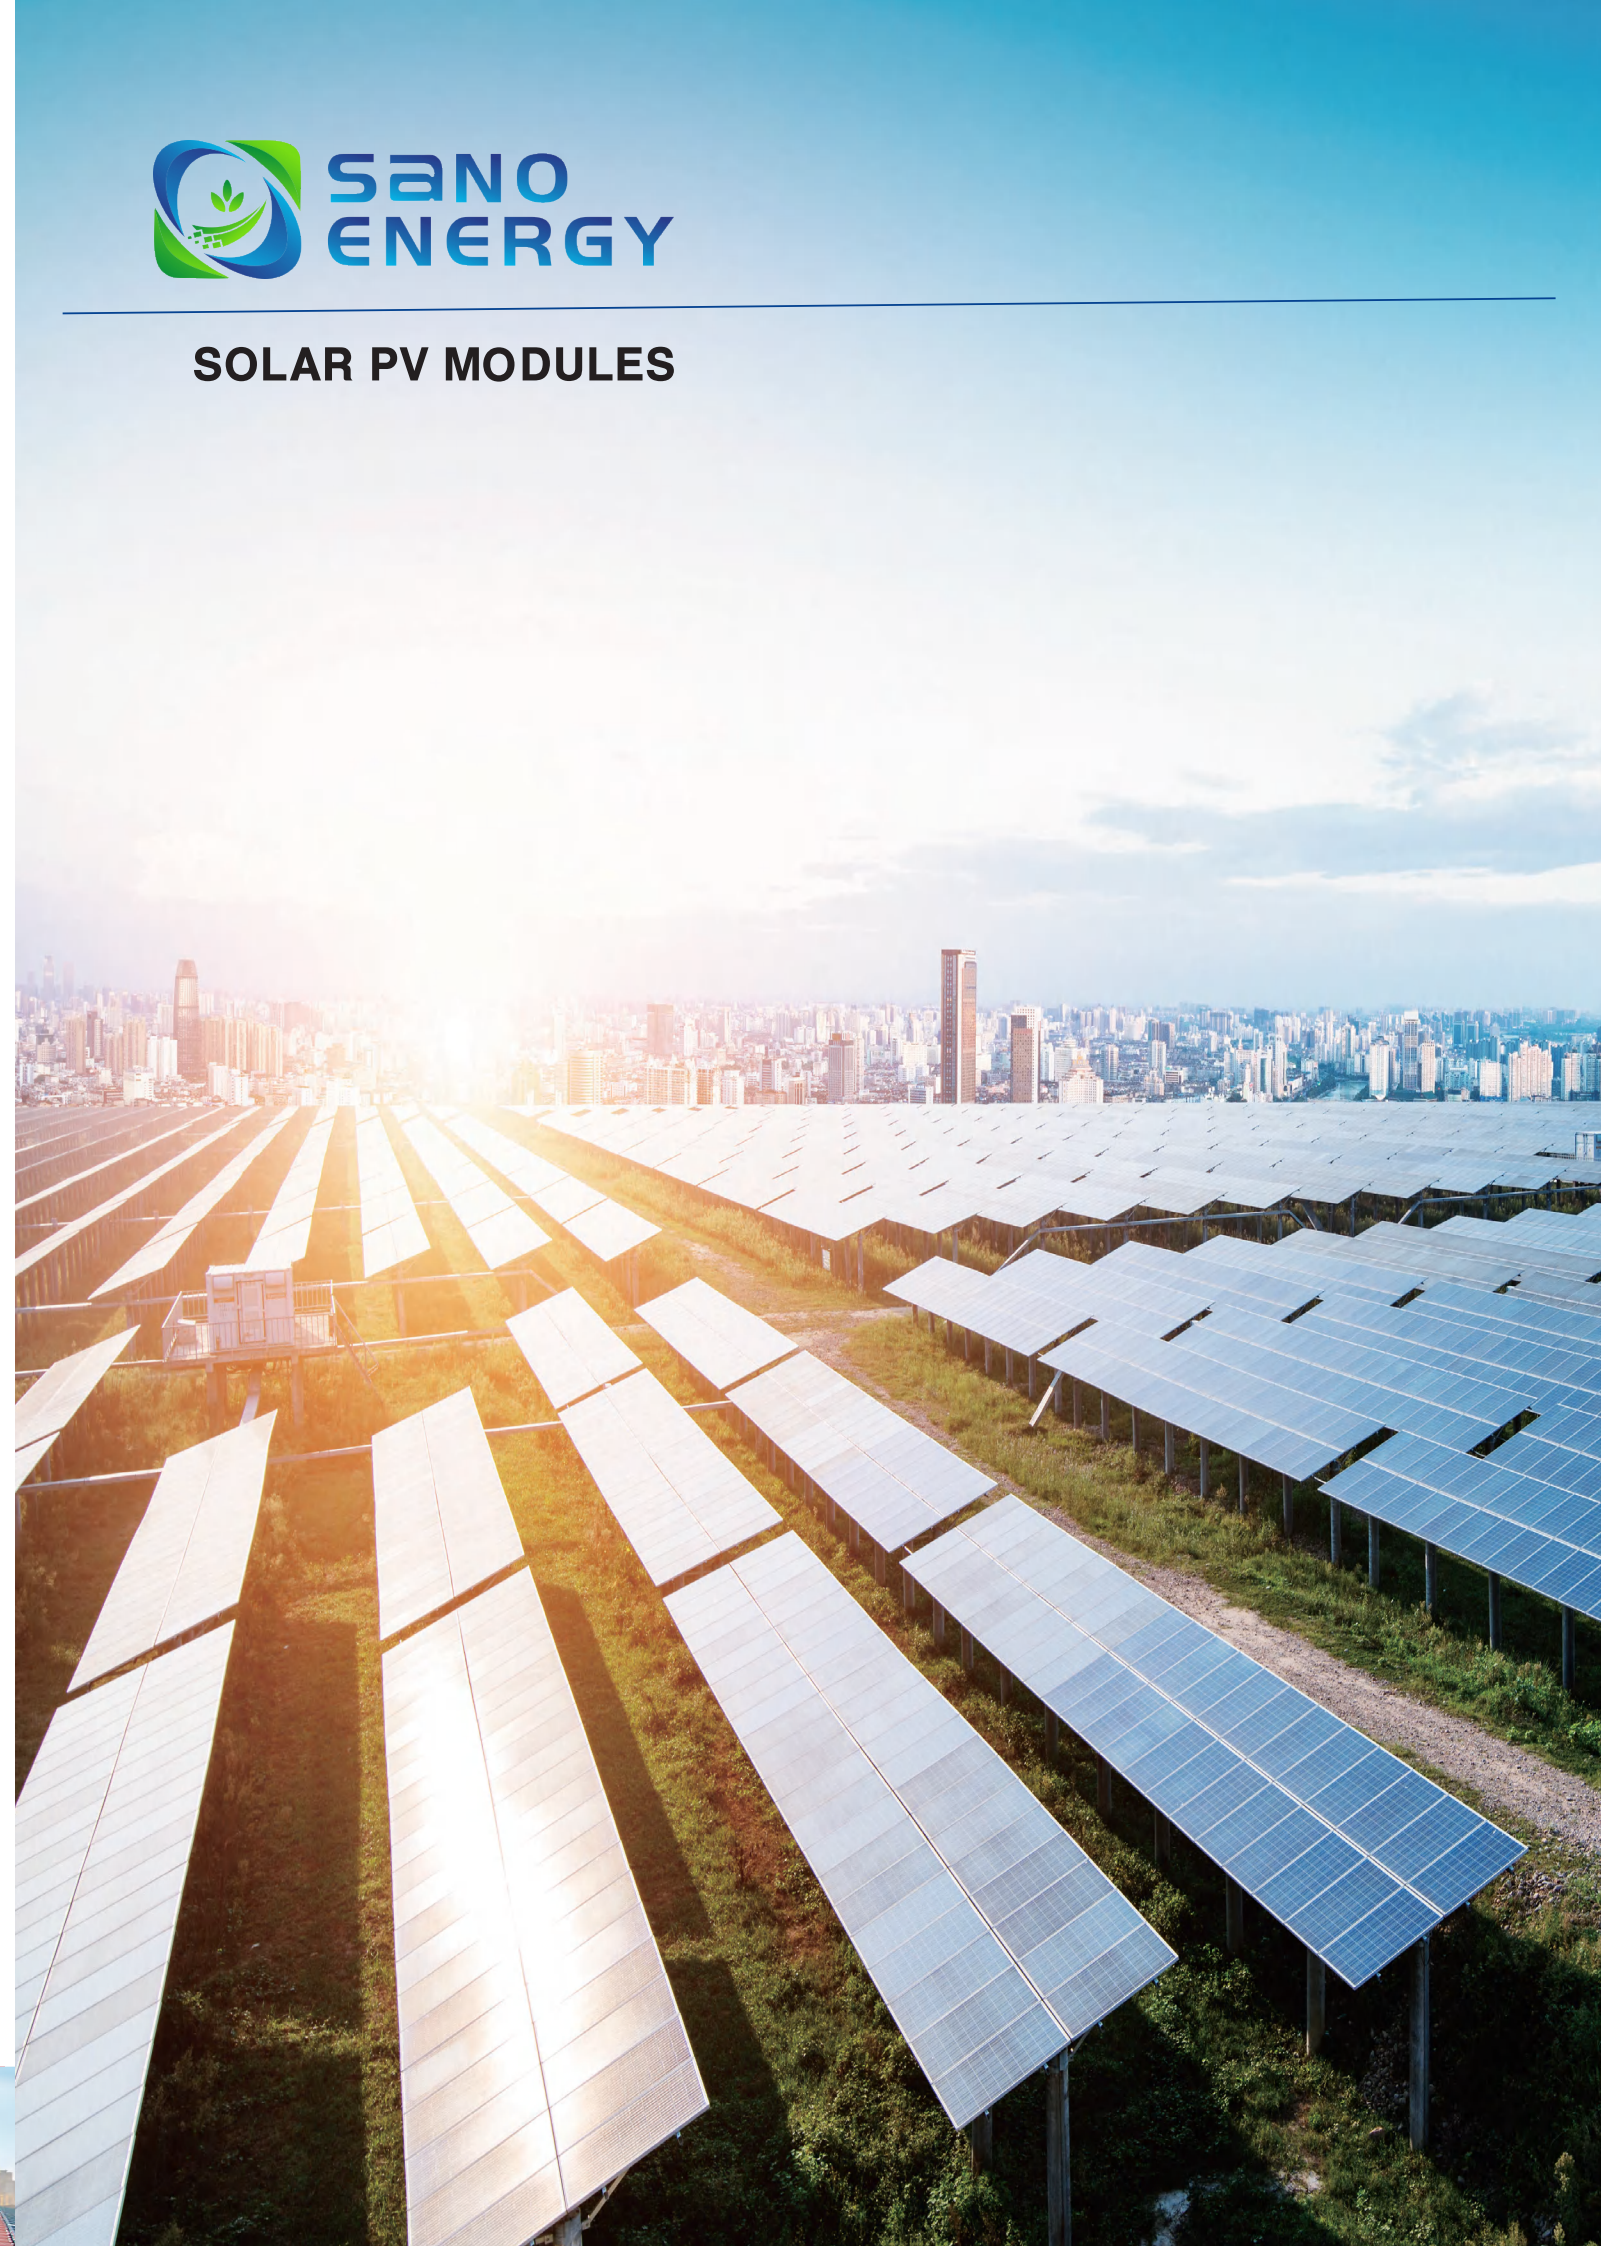

CONTENT

OVERVIEW 2

MANUFACTURING GIANT 3

PRODUCTS

• N Series 5

• Pure Black Series 16

• P Series 25

PROJECTHIGHLIGHT 34

A Bright and Exciting Journey

SanoPower New Energy Group was established in 2010 with the purpose of "providing smart energy solutions to the world". It has invested in the construction of a 50-acre Shenzhen Industrial Park. The group has successively established photovoltaic module divisions, off-grid power supply divisions and LED lighting divisions, and independently developed integration and control modules, gradually realizing and becoming the most competitive technology innovation enterprise. At present, the group has independent research and development and dozens of patents. Over the past ten years, the company's products have been exported to more than 100 countries, working hard for the goal of "lighting up the world"!In 2021, the company was included in the second batch of national smart photovoltaic pilot demonstration enterprises. In addition, the group has obtained ISO90001 quality management system certification.With ISO14001, ISO45001 quality system certification, as well as internationally recognized authoritative certifications such as TUV, CQC, BV, CE, FCC, SanoPower provides you with the most professional photovoltaic energy storage power generation system solutions.



USD4.38 bil
Annual Sales Revenue



5major
Production Bases



38 years
Production Experience




15.3 GW
Solar Modules Manufacturing Capacity



HALF-CELL TECHNOLOGY

By adopting half-cell technology, electrical current density is reduced by 50%, resulting in a 25% decrease in internal power loss and an increase in rated output power.

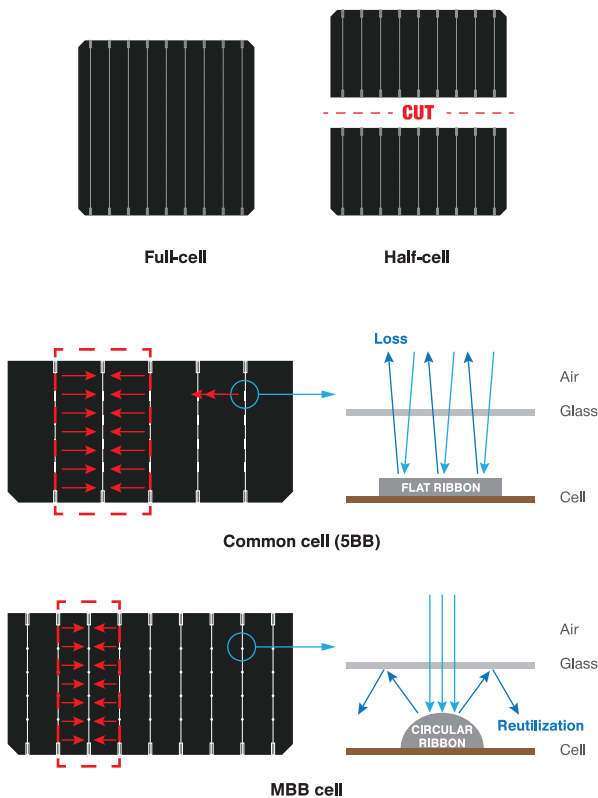


MBB TECHNOLOGY

MBB technology shortens the current collection path by over 50%, minimizes lateral resistance losses, and enhances component poweroutput. LESSO PV modules utilize circular ribbons to reduce shading areasand optimize light reflection for improved energy generation.

NON-DESTRUCTIVE CUTTING TECHNOLOGY

Featuring non-destructive cutting technology, this process ensures smooth cross-sections, reduces micro-crack risks, enhances cell strength. and delivers superior mechanical performance.

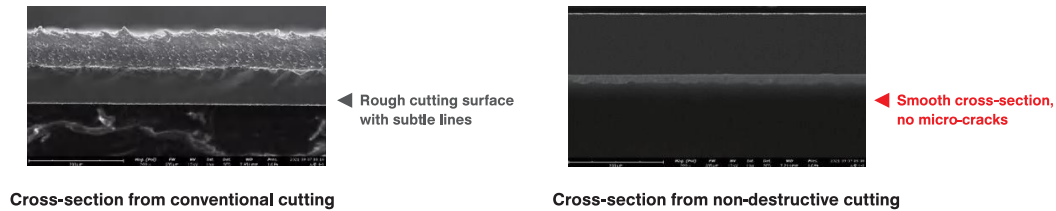

HIGH-DENSITY PACKAGING TECHNOLOGY


Through high-density packaging technology, the effective power-generating area of modules is maximized under the same footprint, improving efficiency without compromising reliability.



TOPCON TECHNOLOGY

TOPCon cells employ advanced surface passivation technology to significantly reduce surface and metal contact recombination.


N-type modules exhibit superior degradation characteristics with only 1% first-year and 0.4% lower annual degradation rates compared to conventional counterparts, delivering 2.1% greater lifetime energy yield that directly enhances project profitability.

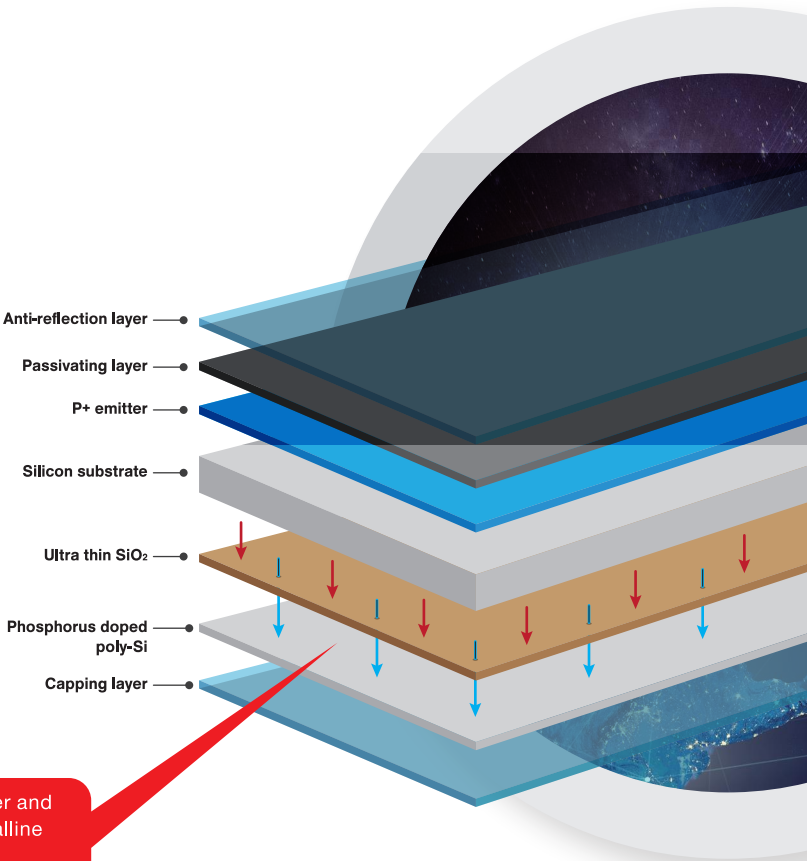

Micro-nano tunneling through the oxide layer and carrier-selective lamination with microcrystalline silicon thin films on the rear side enhance performance.

BIFACIAL TECHNOLOGY

Bifacial modules leverage reflected and scattered light, excelling in high-reflectivity environments with proven long-term reliability and superior quality.

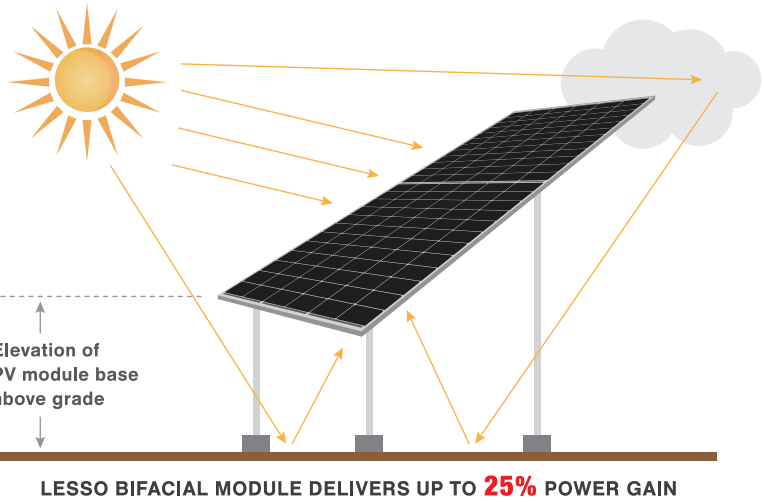

Power generation gain in different scenarios (%)

Water 3~5%	Grass 5~10%	Cement 5~10%	Sand 5~10%	White paint 15~25%

Leading the Future with Intelligent Manufacturing

Our 5 production bases aim to grow into a large-scale global manufacturer of solar solutions, introduce advanced equipment, and create intelligent and automated production lines for intelligent building photovoltaic integrated BIPV, solar PV modules, and solar cells.

Our Production Bases



Our Certificates

IEC 61215, IEC 61730
ISO 9001:2015 Quality Management System
ISO 14001:2015 Environment Management System
ISO 45001:2018 Occupational Health and Safety Management System



N series

Unleash Unlimited Power,Pioneering Innovation

The SanoPower Solar N Series leverages advanced TOPCon technology to achieve a maximum module efficiency of 23.18%.Featuring N-type cells with zero light-induced degradation (LID),this series ensures superior energy yield.With an annual degradation rate of just 1%in the first year and 0.4% thereafter,the N Series delivers exceptional long-term power generation performance,maximizing revenue potential for customers.



Power Range
425W ~ 720W

Maximum Efficiency
23.18%

12 years product
workmanship warranty

25/30 years linear power
output warranty

1% 1st-year degradation
0.40% annual degradation

N Series Mainstream Products

Product	Power (W)	Maximum Efficiency	Size (mm)
182 N-type (54) single glass	425 - 445	22.79%	1722x1134x30
182 N-type (54) double glass			
182 N-type (60) single glass	475 - 495	22.87%	1909x1134x30
182 N-type (60) double glass			
182 N-type (66) single glass	525 - 545	22.95%	2094x1134x30
182 N-type (66) double glass			
182 N-type (72) single glass	575 - 595	23.03%	2278x1134x30
182 N-type (72) double glass			
182 N-type (78) double glass	625 - 640	22.90%	2465x1134x30
210 N-type (54) double glass	560 - 580	22.71%	1960x1303x30
210 N-type (60) double glass	620 - 640	22.61%	2172x1303x30
210 N-type (66) double glass	700 - 720	23.18%	2384x1303x33
210R N-type (54) single glass	490 - 510	22.95%	1960x1134x35
210R N-type (54) double glass			1960x1134x30
210R N-type (60) single glass	545 - 565	22.94%	2172x1134x35
210R N-type (60) double glass			2172x1134x30
210R N-type (66) single glass	595 - 615	22.77%	2382x1134x35
210R N-type (66) double glass			2382x1134x30

Note: see datasheet for details


182 N-type Monofacial Module (54)

Power Range
425W ~ 445W

Power Output Tolerance
0W ~ +5W

Maximum Efficiency
22.79%


Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	108pcs(6×18)
Module Dimension	1722×1134×30mm
Weight	20.7kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm(+), landscape 1400mm(+) 500mm(+), 1400mm(+) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	936pcs

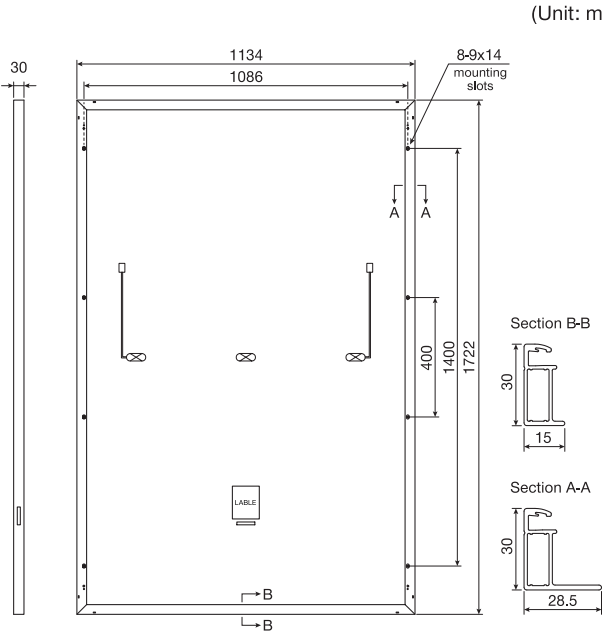

Electrical Performance Parameters										
Model Type	425C(HPM)54(182)		430C(HPM)54(182)		435C(HPM)54(182)		440C(HPM)54(182)		445C(HPM)54(182)	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{max} (W)	425	320	430	323	435	327	440	331	335
Max. Power Voltage	V _{mp} (V)	31.82	29.69	32.00	29.75	32.18	29.97	32.35	30.11	30.26
Max. Power Current	I _{mp} (A)	13.36	10.78	13.44	10.86	13.52	10.93	13.60	11.00	11.08
Open Circuit Voltage	V _{oc} (V)	38.35	36.43	38.54	36.61	38.73	36.79	38.92	36.97	37.15
Short Circuit Current	I _{sc} (A)	14.13	11.42	14.21	11.49	14.29	11.56	14.37	11.63	11.70
Module Efficiency	(%)	21.76		22.02		22.28		22.53		22.79

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (445C)

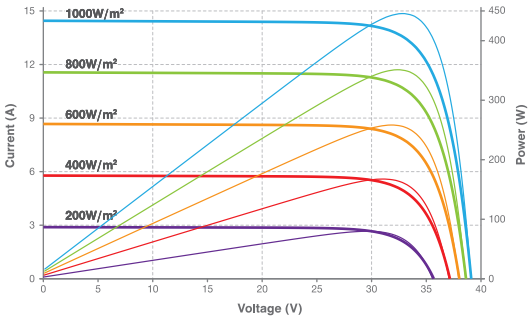


Temperature Characteristics

Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{sc})	+0.043%
Temperature Coefficient (V _{oc})	-0.25%
Temperature Coefficient (P _{max})	-0.30%


Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A


182 N-type Monofacial Module (60)



Power Range
475W ~ 495W



Power Output Tolerance
0W ~ +5W




Maximum Efficiency
22.87%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	1909×1134×30mm
Weight	22.1kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm(+), landscape 1400mm(+) 200mm(-), 1400mm(-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	864pcs


(Unit: mm)

Technical drawing of the 182 N-type Monofacial Module (60) showing dimensions and cross-sections. The main dimensions are 1134mm (width), 1909mm (height), and 30mm (thickness). The width is divided into 1086mm and 14mm. The height is divided into 1400mm and 509mm. The drawing includes cross-sections A-A and B-B, showing the internal structure and the 8-9x14 mounting slots. The junction box is located at the bottom center, and the cables are connected to the junction box.


182 N-type Monofacial Module (66)



Power Range
525W ~ 545W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.95%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	132pcs(6×22)
Module Dimension	2094×1134×30mm
Weight	23.8kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm(+), landscape 1400mm(+) 200mm(-), 1400mm(-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	792pcs

(Unit: mm)

Technical drawing of the 182 N-type Monofacial Module (66) showing dimensions and cross-sections. The main dimensions are 1134mm (width), 2094mm (height), and 30mm (thickness). The width is divided into 1086mm and 14mm. The height is divided into 1400mm and 694mm. The drawing includes cross-sections A-A and B-B, showing the internal structure and the 8-9x14 mounting slots. The junction box is located at the bottom center, and the cables are connected to the junction box.

Electrical Performance Parameters												
Model Type	475C(HPM)60(182)		480C(HPM)60(182)		485C(HPM)60(182)		490C(HPM)60(182)		495C(HPM)60(182)			
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT		
Nominal Max. Power	P _{MAX} (W)		475	358	480	362	485	366	490	370	495	374
Max. Power Voltage	V _{MPP} (V)		35.35	33.34	35.51	33.52	35.66	33.71	35.82	33.90	35.99	34.09
Max. Power Current	I _{MPP} (A)		13.44	10.74	13.52	10.80	13.60	10.86	13.68	10.92	13.76	10.98
Open Circuit Voltage	V _{OC} (V)		42.50	40.45	42.67	40.61	42.83	40.77	42.99	40.93	43.15	41.09
Short Circuit Current	I _{SC} (A)		14.19	11.49	14.27	11.56	14.35	11.63	14.43	11.70	14.51	11.77
Module Efficiency	(%)		21.94		22.17		22.40		22.63		22.87	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Electrical Performance Parameters												
Model Type	525C(HPM)66(182)		530C(HPM)66(182)		535C(HPM)66(182)		540C(HPM)66(182)		545C(HPM)66(182)			
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT		
Nominal Max. Power	P _{MAX} (W)		525	395	530	399	535	403	540	407	545	411
Max. Power Voltage	V _{MPP} (V)		38.83	36.75	38.97	36.92	39.11	37.08	39.24	37.25	39.39	37.42
Max. Power Current	I _{MPP} (A)		13.52	10.75	13.60	10.81	13.68	10.87	13.76	10.93	13.84	10.99
Open Circuit Voltage	V _{OC} (V)		46.31	44.15	46.36	44.29	46.41	44.43	46.46	44.57	46.51	44.71
Short Circuit Current	I _{SC} (A)		14.25	11.56	14.33	11.63	14.41	11.70	14.49	11.77	14.57	11.84
Module Efficiency	(%)		22.11		22.32		22.53		22.74		22.95	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (495C)

Current-Voltage & Power-Voltage Curve (495C) graph showing Current (A) and Power (W) vs Voltage (V) for various irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The graph shows that as irradiance increases, the current and power also increase. The power curve peaks at approximately 44°C.

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{SC})	+0.043%
Temperature Coefficient (V _{OC})	-0.25%
Temperature Coefficient (P _{MAX})	-0.30%

Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A

Current-Voltage & Power-Voltage Curve (545C)

Current-Voltage & Power-Voltage Curve (545C) graph showing Current (A) and Power (W) vs Voltage (V) for various irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The graph shows that as irradiance increases, the current and power also increase. The power curve peaks at approximately 44°C.

Temperature Characteristics


Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{SC})	+0.043%
Temperature Coefficient (V _{OC})	-0.25%
Temperature Coefficient (P _{MAX})	-0.30%

Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A

7


182 N-type Monofacial Module (72)



Power Range
575W ~ 595W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
23.03%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	144pcs(6×24)
Module Dimension	2278×1134×30mm
Weight	26.9kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 200mm (-) , 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	720pcs

(Unit: mm)

Electrical Performance Parameters										
Model Type	575C(HPM)72(182)		580C(HPM)72(182)		585C(HPM)72(182)		590C(HPM)72(182)		595C(HPM)72(182)	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)	575	433	580	437	585	441	590	445	595
Max. Power Voltage	V _{MP} (V)	42.38	39.84	42.53	39.95	42.67	40.10	42.82	40.24	42.97
Max. Power Current	I _{MP} (A)	13.57	10.87	13.64	10.94	13.71	11.00	13.78	11.06	13.85
Open Circuit Voltage	V _{OC} (V)	52.23	48.29	52.43	48.42	52.63	48.56	52.83	48.70	53.03
Short Circuit Current	I _{SC} (A)	14.35	11.58	14.43	11.64	14.51	11.71	14.59	11.77	14.67
Module Efficiency	(%)	22.26		22.45		22.65		22.84		23.03


* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (595C)


Temperature Characteristics	
Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{SC})	+0.043%
Temperature Coefficient (V _{OC})	-0.25%
Temperature Coefficient (P _{MAX})	-0.30%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A

182 N-type Bifacial Module (54)



Power Range
425W ~ 445W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.79%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	108pcs(6×18)
Module Dimension	1722×1134×30mm
Weight	23.1kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy / Polyurethane Composite Frame
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 200mm (-) , 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	936pcs

(Unit: mm)

Electrical Performance Parameters										
Model Type	425C(HBD)54(182)		430C(HBD)54(182)		435C(HBD)54(182)		440C(HBD)54(182)		445C(HBD)54(182)	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)	425	319	430	323	435	327	440	331	445
Max. Power Voltage	V _{MP} (V)	31.65	29.82	31.88	30.02	32.11	30.23	32.34	30.43	32.57
Max. Power Current	I _{MP} (A)	13.43	10.70	13.49	10.76	13.55	10.82	13.61	10.88	13.67
Open Circuit Voltage	V _{OC} (V)	37.17	34.68	37.37	34.87	37.57	35.06	37.77	35.25	37.97
Short Circuit Current	I _{SC} (A)	14.67	11.90	14.73	11.95	14.79	12.00	14.85	12.05	14.91
Module Efficiency	(%)	21.76		22.02		22.28		22.53		22.79

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (445C)

Bifacial Output-rearside Power Gain					
5%	Maximum Power	P _{MAX} (W)	446	452	457
	Module Efficiency	(%)	22.85	23.12	23.39
10%	Maximum Power	P _{MAX} (W)	468	473	479
	Module Efficiency	(%)	23.94	24.22	24.50
25%	Maximum Power	P _{MAX} (W)	531	538	544
	Module Efficiency	(%)	27.21	27.53	27.85

Temperature Characteristics				Maximum Parameters	
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{OC})	-0.25%	Working Temperature	-40~+85°C
Temperature Coefficient (I _{SC})	+0.043%	Temperature Coefficient (P _{MAX})	-0.30%	Maximum System Voltage	1500V DC
				Nominal Maximum Fuse Current	30A


8

182 N-type Bifacial Module (60)

Power Range
475W ~ 495WPower Output Tolerance
0W ~ +5WMaximum Efficiency
22.87%

Structure Performance

Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	1909×1134×30mm
Weight	25.7kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy / Polyurethane Composite Frame
Junction Box	IP68 rated
Cable	4mm ² , portrait ^{400mm (+)} / _{200mm (-)} , landscape ^{1400mm (+)} / _{1400mm (-)} Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	864pcs

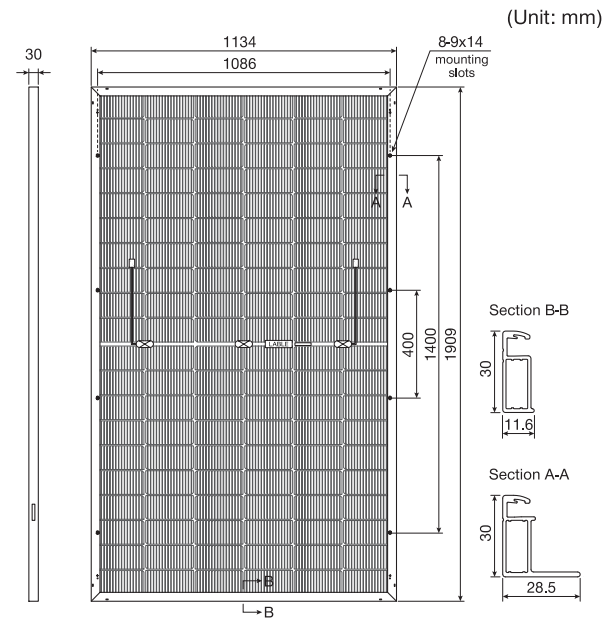


(Unit: mm)

Electrical Performance Parameters

Model Type		475C(HBD)60(182)		480C(HBD)60(182)		485C(HBD)60(182)		490C(HBD)60(182)		495C(HBD)60(182)	
Testing Condition		STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)	475	357	480	361	485	365	490	369	495	373
Max. Power Voltage	V _{MP} (V)	35.27	33.25	35.48	33.43	35.69	33.61	35.90	33.80	36.11	33.98
Max. Power Current	I _{MP} (A)	13.47	10.74	13.53	10.80	13.59	10.86	13.65	10.92	13.71	10.98
Open Circuit Voltage	V _{OC} (V)	41.87	39.34	42.07	39.53	42.27	39.72	42.47	39.91	42.67	40.10
Short Circuit Current	I _{SC} (A)	14.55	11.84	14.61	11.89	14.67	11.94	14.73	11.99	14.79	12.04
Module Efficiency	(%)	21.94		22.17		22.40		22.63		22.87	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (495C)

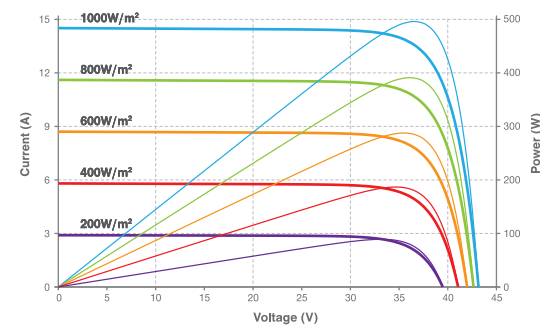

Bifacial Output-rearside Power Gain

5%	Maximum Power	P_{MAX} (W)	499	504	509	515	520
	Module Efficiency	(%)	23.04	23.28	23.52	23.77	24.01
10%	Maximum Power	P_{MAX} (W)	523	528	534	539	545
	Module Efficiency	(%)	24.14	24.39	24.64	24.90	25.15
25%	Maximum Power	P_{MAX} (W)	594	600	606	613	619
	Module Efficiency	(%)	27.43	27.72	28.00	28.29	28.58

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V_{OC})	-0.25%
Temperature Coefficient (I_{SC})	+0.043%	Temperature Coefficient (P_{MAX})	-0.30%

Maximum Parameters


Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A

182 N-type Bifacial Module (66)

Power Range
525W ~ 545WPower Output Tolerance
0W ~ +5WMaximum Efficiency
22.95%

Structure Performance

Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	132pcs(6×22)
Module Dimension	2094×1134×30mm
Weight	28.4kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy / Polyurethane Composite Frame
Junction Box	IP68 rated
Cable	4mm ² , portrait ^{400mm (+)} / _{200mm (-)} , landscape ^{1400mm (+)} / _{1400mm (-)} Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	792pcs

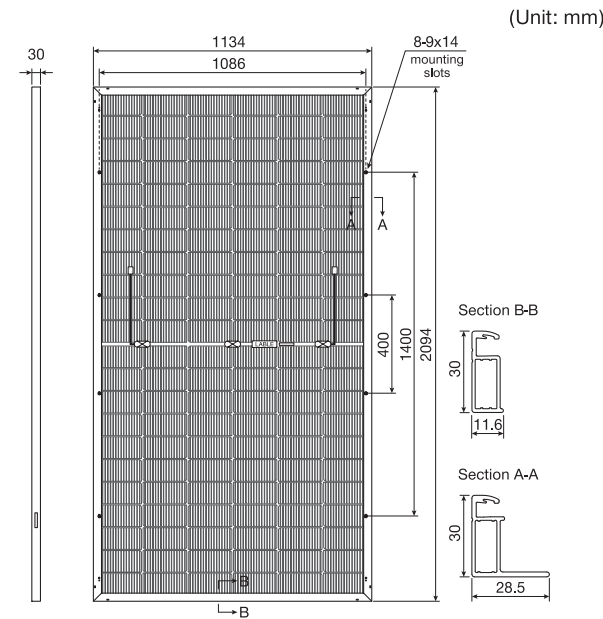


(Unit: mm)

Electrical Performance Parameters

Model Type		525C(HBD)66(182)		530C(HBD)66(182)		535C(HBD)66(182)		540C(HBD)66(182)		545C(HBD)66(182)	
Testing Condition		STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{max} (W)	525	394	530	398	535	402	540	406	545	410
Max. Power Voltage	V _{MP} (V)	38.89	36.55	39.09	36.72	39.29	36.89	39.49	37.06	39.69	37.22
Max. Power Current	I _{MP} (A)	13.50	10.78	13.56	10.84	13.62	10.90	13.68	10.96	13.74	11.02
Open Circuit Voltage	V _{OC} (V)	46.57	44.00	46.77	44.19	46.97	44.38	47.17	44.57	47.37	44.76
Short Circuit Current	I _{SC} (A)	14.43	11.68	14.49	11.73	14.55	11.78	14.61	11.83	14.67	11.88
Module Efficiency	(%)	22.11		22.32		22.53		22.74		22.95	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (545C)

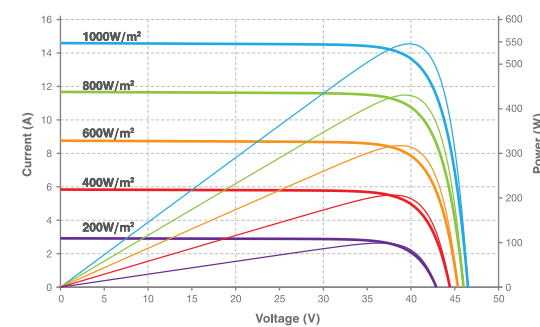

Bifacial Output-rearside Power Gain

5%	Maximum Power	P_{MAX} (W)	551	557	562	567	572
	Module Efficiency	(%)	23.21	23.44	23.66	23.88	24.10
10%	Maximum Power	P_{MAX} (W)	578	583	589	594	600
	Module Efficiency	(%)	24.32	24.55	24.78	25.01	25.25
25%	Maximum Power	P_{MAX} (W)	656	663	669	675	681
	Module Efficiency	(%)	27.64	27.90	28.16	28.43	28.69


Temperature Characteristics

Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V_{OC})	-0.25%
Temperature Coefficient (I_{SC})	+0.043%	Temperature Coefficient (P_{MAX})	-0.30%


Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A


182 N-type Bifacial Module (72)



Power Range
575W ~ 595W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
23.03%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	144pcs(6×24)
Module Dimension	2278×1134×30mm
Weight	31.2kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy / Polyurethane Composite Frame
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	720pcs

(Unit: mm)

Electrical Performance Parameters										
Model Type	575C(HBD)72(182)		580C(HBD)72(182)		585C(HBD)72(182)		590C(HBD)72(182)		595C(HBD)72(182)	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)	575	433	580	437	585	441	590	445	595
Max. Power Voltage	V _{MPP} (V)	42.60	40.02	42.75	40.17	42.89	40.32	43.04	40.47	43.18
Max. Power Current	I _{MPP} (A)	13.50	10.82	13.57	10.88	13.64	10.94	13.71	11.00	13.78
Open Circuit Voltage	V _{OC} (V)	51.23	48.66	51.43	48.85	51.63	49.04	51.83	49.23	52.03
Short Circuit Current	I _{SC} (A)	14.27	11.51	14.33	11.56	14.39	11.61	14.45	11.66	14.51
Module Efficiency	(%)	22.26		22.45		22.65		22.84		23.03

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.


Current-Voltage & Power-Voltage Curve (595C)

Bifacial Output-rearside Power Gain						
5%	Maximum Power	P _{MAX} (W)	604	609	614	620
	Module Efficiency	(%)	23.37	23.57	23.78	24.18
10%	Maximum Power	P _{MAX} (W)	633	638	644	649
	Module Efficiency	(%)	24.48	24.70	24.91	25.34
25%	Maximum Power	P _{MAX} (W)	719	725	731	738
	Module Efficiency	(%)	27.82	28.07	28.31	28.79


Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{OC})	-0.25%
Temperature Coefficient (I _{SC})	+0.043%	Temperature Coefficient (P _{MAX})	-0.30%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A


182 N-type Bifacial Module (78)



Power Range
625W ~ 640W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.90%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	156pcs(6x26)
Module Dimension	2465×1134×30mm
Weight	33.5kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy / Polyurethane Composite Frame
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	576pcs

(Unit: mm)

Electrical Performance Parameters									
Model Type	625C(HBD)78(182)		630C(HBD)78(182)		635C(HBD)78(182)		640C(HBD)78(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	625	470	630	474	635	478	640	482
Max. Power Voltage	V _{MPP} (V)	46.24	43.43	46.37	43.57	46.50	43.71	46.63	43.85
Max. Power Current	I _{MPP} (A)	13.52	10.83	13.59	10.88	13.66	10.94	13.73	11.00
Open Circuit Voltage	V _{OC} (V)	56.31	52.35	56.46	52.49	56.61	52.63	56.76	52.77
Short Circuit Current	I _{SC} (A)	14.34	11.57	14.42	11.63	14.50	11.70	14.58	11.76
Module Efficiency	(%)	22.36		22.54		22.72		22.90	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (640C)


Bifacial Output-rearside Power Gain					
5%	Maximum Power	P _{MAX} (W)	656	662	667
	Module Efficiency	(%)	23.48	23.66	23.85
10%	Maximum Power	P _{MAX} (W)	688	693	699
	Module Efficiency	(%)	24.59	24.79	24.99
25%	Maximum Power	P _{MAX} (W)	781	788	794
	Module Efficiency	(%)	27.95	28.17	28.40

Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{OC})	-0.25%
Temperature Coefficient (I _{SC})	+0.043%	Temperature Coefficient (P _{MAX})	-0.30%


Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A

10


210 N-type Bifacial Module (54)



Power Range
560W ~ 580W




Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.71%


Structure Performance	
Solar Cell Type	210mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	108pcs(6×18)
Module Dimension	1960×1303×30mm
Weight	31.7kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	648pcs

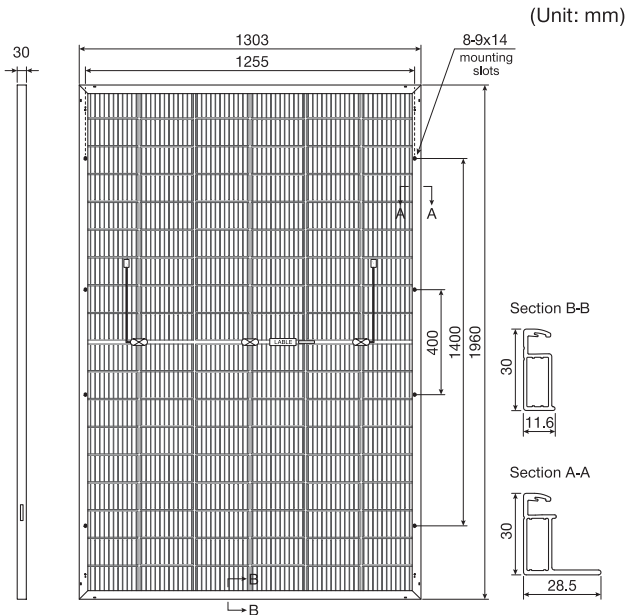

Electrical Performance Parameters										
Model Type	560C(HBD)54(210)		565C(HBD)54(210)		570C(HBD)54(210)		575C(HBD)54(210)		580C(HBD)54(210)	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)	560	430	565	434	570	438	575	442	580
Max. Power Voltage	V _{MPP} (V)	32.36	30.55	32.55	30.74	32.75	30.94	32.94	31.13	33.14
Max. Power Current	I _{MPP} (A)	17.31	14.08	17.36	14.12	17.41	14.16	17.46	14.20	17.51
Open Circuit Voltage	V _{OC} (V)	41.02	35.38	41.22	35.56	41.41	35.75	41.61	35.93	41.81
Short Circuit Current	I _{SC} (A)	18.11	11.78	18.15	11.81	18.19	11.84	18.23	11.87	18.27
Module Efficiency	(%)	21.93		22.12		22.32		22.51		22.71

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (580C)

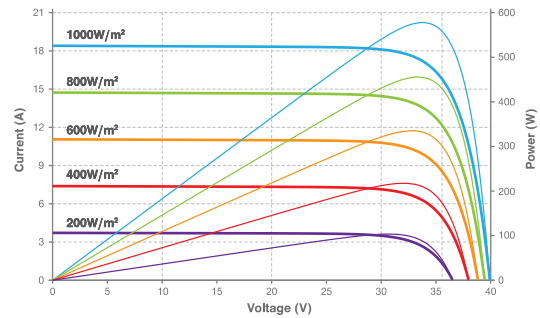


Bifacial Output-rearside Power Gain						
5%	Maximum Power	P _{MAX} (W)	588	593	599	604
	Module Efficiency	(%)	23.02	23.23	23.43	23.64
10%	Maximum Power	P _{MAX} (W)	616	622	627	633
	Module Efficiency	(%)	24.12	24.34	24.55	24.77
25%	Maximum Power	P _{MAX} (W)	700	706	713	719
	Module Efficiency	(%)	27.41	27.65	27.90	28.14

Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{OC})	-0.25%
Temperature Coefficient (I _{SC})	+0.043%	Temperature Coefficient (P _{MAX})	-0.30%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	35A


210 N-type Bifacial Module (60)



Power Range
620W ~ 640W




Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.61%


Structure Performance	
Solar Cell Type	210mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	2172×1303×30mm
Weight	34.5kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	648pcs

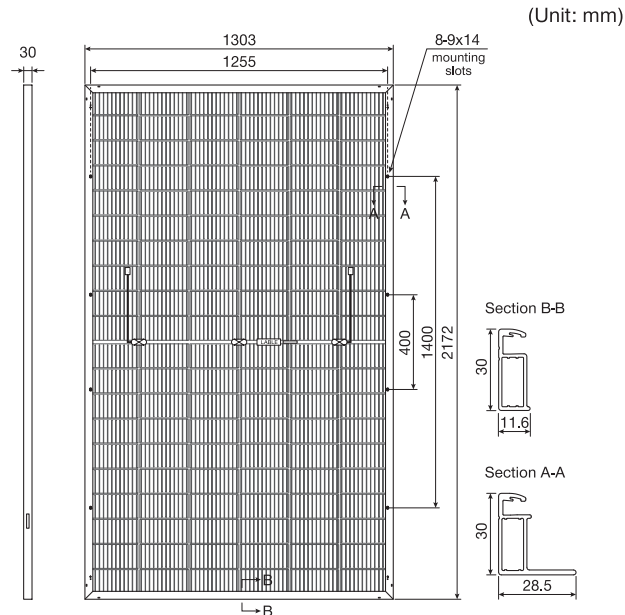

Electrical Performance Parameters										
Model Type	620C(HBD)60(210)		625C(HBD)60(210)		630C(HBD)60(210)		635C(HBD)60(210)		640C(HBD)60(210)	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)	620	474	625	486	630	482	635	486	640
Max. Power Voltage	V _{MPP} (V)	35.70	33.62	35.91	33.83	36.11	34.04	36.33	34.25	36.54
Max. Power Current	I _{MPP} (A)	17.37	14.10	17.41	14.13	17.45	14.16	17.48	14.19	17.52
Open Circuit Voltage	V _{OC} (V)	45.15	41.15	45.36	41.36	45.58	41.58	45.80	41.79	46.02
Short Circuit Current	I _{SC} (A)	18.18	14.65	18.22	14.69	18.26	14.73	18.30	14.77	18.34
Module Efficiency	(%)	21.91		22.08		22.26		22.44		22.61

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (640C)

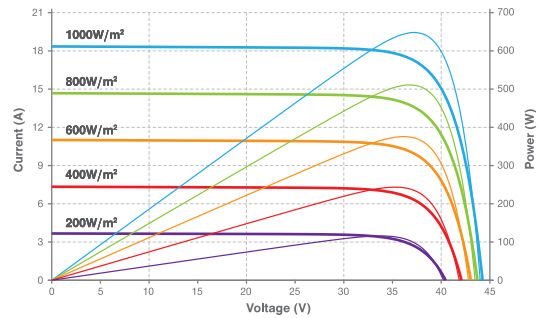


Bifacial Output-rearside Power Gain						
5%	Maximum Power	P _{MAX} (W)	651	656	662	667
	Module Efficiency	(%)	23.00	23.19	23.37	23.56
10%	Maximum Power	P _{MAX} (W)	682	688	693	699
	Module Efficiency	(%)	24.10	24.29	24.49	24.68
25%	Maximum Power	P _{MAX} (W)	775	781	788	794
	Module Efficiency	(%)	27.38	27.60	27.83	28.05


Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{OC})	-0.25%
Temperature Coefficient (I _{SC})	+0.043%	Temperature Coefficient (P _{MAX})	-0.30%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	35A


210 N-type Bifacial Module (66)



Power Range
700W ~ 720W




Power Output Tolerance
0W ~ +5W



Maximum Efficiency
23.18%


Structure Performance	
Solar Cell Type	210mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	132pcs(6x22)
Module Dimension	2384×1303×33mm
Weight	37.8kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	33pcs
Per Container(40'HQ)	594pcs

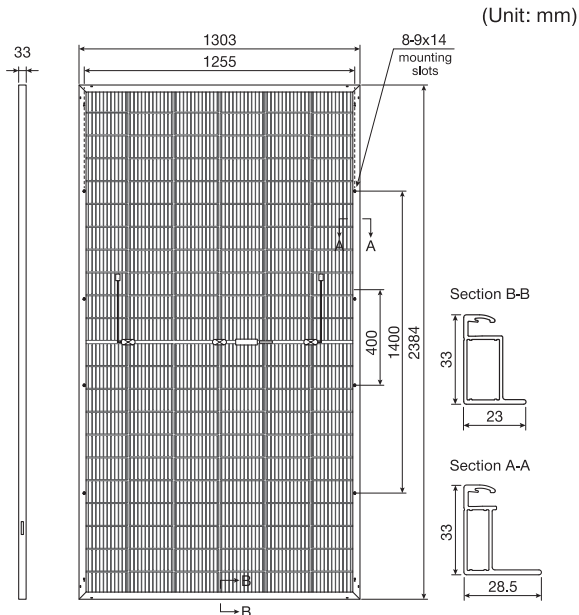

Electrical Performance Parameters											
Model Type		700C(HBD)66(210)		705C(HBD)66(210)		710C(HBD)66(210)		715C(HBD)66(210)		720C(HBD)66(210)	
Testing Condition		STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{max} (W)	700	535	705	539	710	543	715	547	720	551
Max. Power Voltage	V _{mp} (V)	40.07	37.66	40.29	37.86	40.51	38.06	40.72	38.26	40.94	38.46
Max. Power Current	I _{mp} (A)	17.47	14.21	17.50	14.24	17.53	14.27	17.56	14.30	17.59	14.33
Open Circuit Voltage	V _{oc} (V)	50.34	46.07	50.55	46.28	50.76	46.50	50.97	46.71	51.18	46.92
Short Circuit Current	I _{sc} (A)	18.37	14.81	18.41	14.85	18.45	14.89	18.49	14.93	18.53	14.97
Module Efficiency	(%)	22.53		22.70		22.86		23.02		23.18	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (720C)

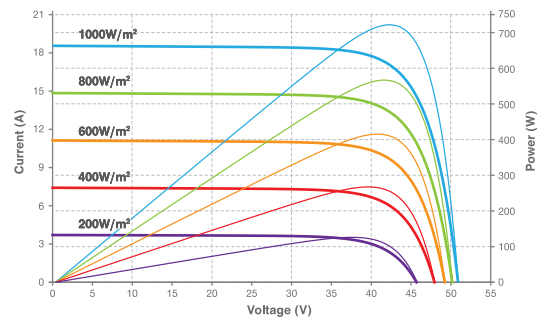


Bifacial Output-rearside Power Gain							
5%	Maximum Power	P _{MAX} (W)	735	740	746	751	756
	Module Efficiency	(%)	23.66	23.83	24.00	24.17	24.34
10%	Maximum Power	P _{MAX} (W)	770	776	781	787	792
	Module Efficiency	(%)	24.79	24.96	25.14	25.32	25.50
25%	Maximum Power	P _{MAX} (W)	875	881	888	894	900
	Module Efficiency	(%)	28.17	28.37	28.57	28.77	28.97

Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V_{OC})	-0.25%
Temperature Coefficient (I_{SC})	+0.043%	Temperature Coefficient (P_{MAX})	-0.30%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	35A


210R N-type Monofacial Module (54)



Power Range
490W ~ 510W




Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.95%


Structure Performance	
Solar Cell Type	210R N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	108pcs(6x18)
Module Dimension	1960×1134×35mm
Weight	27.1kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs
Per Container(40'HQ)	744pcs

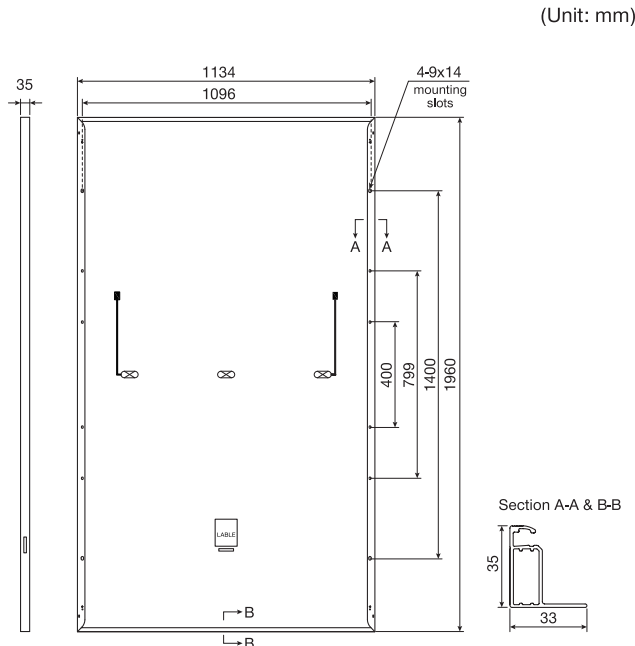

Electrical Performance Parameters											
Model Type		490C(HPM)54(210R)		495C(HPM)54(210R)		500C(HPM)54(210R)		505C(HPM)54(210R)		510C(HPM)54(210R)	
Testing Condition		STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)	490	370	495	374	500	378	505	382	510	386
Max. Power Voltage	V _{MP} (V)	32.95	30.91	33.08	31.03	33.21	31.15	33.34	31.27	33.47	31.39
Max. Power Current	I _{MP} (A)	14.88	11.98	14.97	12.06	15.06	12.14	15.15	12.22	15.24	12.30
Open Circuit Voltage	V _{OC} (V)	40.29	38.23	40.40	38.34	40.51	38.44	40.62	38.55	40.73	38.65
Short Circuit Current	I _{SC} (A)	15.84	12.78	15.93	12.85	16.02	12.92	16.10	12.99	16.19	13.06
Module Efficiency	(%)	22.05		22.27		22.50		22.72		22.95	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (510C)

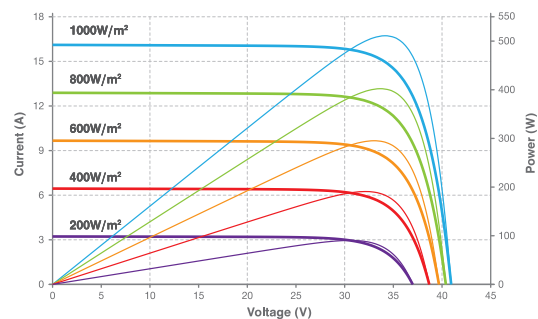

Temperature Characteristics	
Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I_{SC})	+0.043%
Temperature Coefficient (V_{OC})	-0.25%
Temperature Coefficient (P_{MAX})	-0.30%


Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	35A

210R N-type Bifacial Module (54)

Power Range
490W ~ 510WPower Output Tolerance
0W ~ +5WMaximum Efficiency
22.95%

Structure Performance

Solar Cell Type	210R N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	108pcs(6×18)
Module Dimension	1960×1134×30mm
Weight	27.4kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm ² , portrait 400mm (+) 200mm (-), landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	864pcs

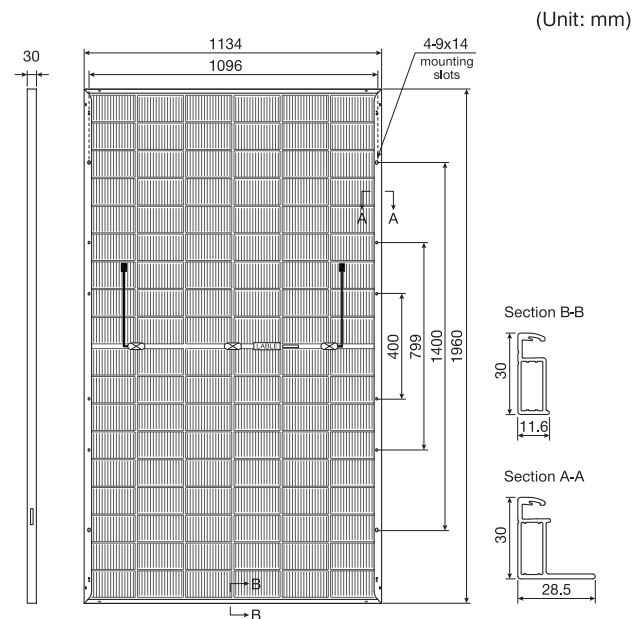


(Unit: mm)

Electrical Performance Parameters

Model Type		490C(HBD)54(210R)		495C(HBD)54(210R)		500C(HBD)54(210R)		505C(HBD)54(210R)		510C(HBD)54(210R)	
Testing Condition		STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)	490	370	495	374	500	378	505	382	510	386
Max. Power Voltage	V _{MP} (V)	33.14	31.02	33.27	31.17	33.41	31.32	33.55	31.47	33.68	31.62
Max. Power Current	I _{MP} (A)	14.79	11.93	14.88	12.00	14.97	12.07	15.06	12.14	15.15	12.21
Open Circuit Voltage	V _{OC} (V)	40.50	38.43	40.61	38.54	40.72	38.64	40.83	38.75	40.94	38.85
Short Circuit Current	I _{SC} (A)	15.76	12.71	15.85	12.79	15.94	12.86	16.02	12.93	16.11	13.00
Module Efficiency	(%)	22.05		22.27		22.50		22.72		22.95	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (510C)

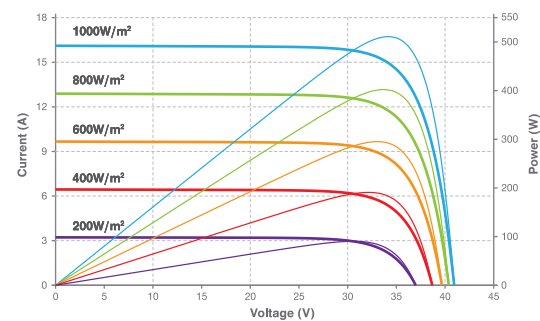

Bifacial Output-rearside Power Gain

5%	Maximum Power	P_{MAX} (W)	515	520	525	530	536
	Module Efficiency	(%)	23.15	23.38	23.62	23.86	24.09
10%	Maximum Power	P_{MAX} (W)	539	545	550	556	561
	Module Efficiency	(%)	24.25	24.50	24.75	24.99	25.24
25%	Maximum Power	P_{MAX} (W)	613	619	625	631	638
	Module Efficiency	(%)	27.56	27.84	28.12	28.40	28.68

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V_{OC})	-0.25%
Temperature Coefficient (I_{SC})	+0.043%	Temperature Coefficient (P_{MAX})	-0.30%

Maximum Parameters


Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	35A

210R N-type Bifacial Module (60)

Power Range
545W ~ 565WPower Output Tolerance
0W ~ +5WMaximum Efficiency
22.94%

Structure Performance

Solar Cell Type	210R N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	2172×1134×30mm
Weight	30.0kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm ² , portrait 400mm (+) 200mm (-), landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	720pcs

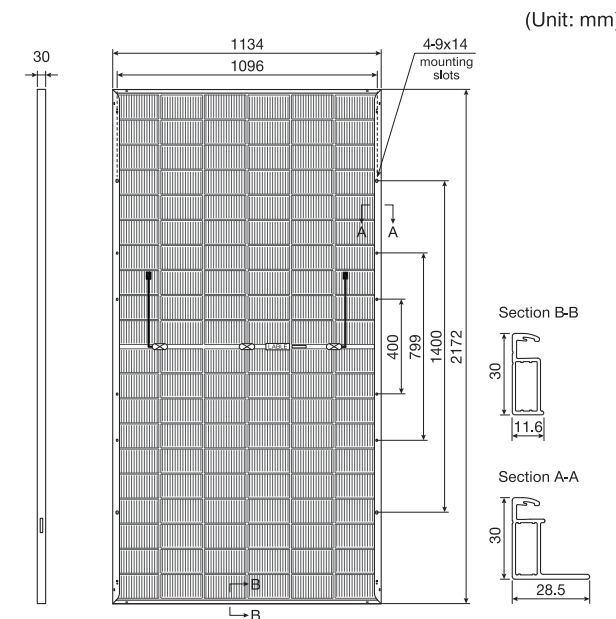


(Unit: mm)

Electrical Performance Parameters

Model Type		545C(HBD)60(210R)		550C(HBD)60(210R)		555C(HBD)60(210R)		560C(HBD)60(210R)		565C(HBD)60(210R)	
Testing Condition		STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)	545	411	550	415	555	419	560	423	565	427
Max. Power Voltage	V _{MP} (V)	36.63	34.36	36.77	34.49	36.91	34.62	37.05	34.75	37.19	34.88
Max. Power Current	I _{MP} (A)	14.88	11.97	14.96	12.04	15.04	12.11	15.12	12.18	15.20	12.25
Open Circuit Voltage	V _{OC} (V)	44.34	42.08	44.47	42.20	44.59	42.31	44.71	42.43	44.83	42.54
Short Circuit Current	I _{SC} (A)	15.78	12.73	15.87	12.80	15.96	12.87	16.04	12.94	16.13	13.01
Module Efficiency	(%)	22.13		22.33		22.53		22.74		22.94	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (565C)

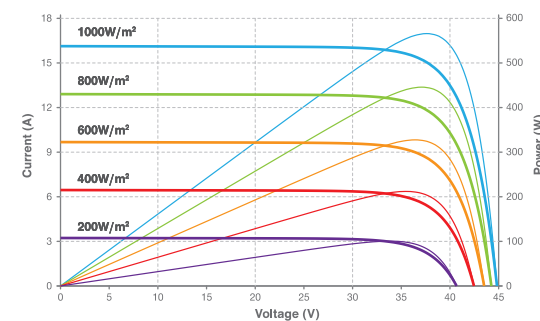

Bifacial Output-rearside Power Gain

5%	Maximum Power	P_{MAX} (W)	572	578	583	588	593
	Module Efficiency	(%)	23.23	23.45	23.66	23.87	24.09
10%	Maximum Power	P_{MAX} (W)	600	605	611	616	622
	Module Efficiency	(%)	24.34	24.56	24.79	25.01	25.23
25%	Maximum Power	P_{MAX} (W)	681	688	694	700	706
	Module Efficiency	(%)	27.66	27.91	28.17	28.42	28.67

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V_{OC})	-0.25%
Temperature Coefficient (I_{SC})	+0.043%	Temperature Coefficient (P_{MAX})	-0.30%

Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	35A

210R N-type Monofacial Module (60)



Power Range
545W ~ 565W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.94%

Structure Performance	
Solar Cell Type	210R N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	2172×1134×35mm
Weight	29.7kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs
Per Container(40'HQ)	620pcs


(Unit: mm)

Technical drawing of the 210R N-type Monofacial Module (60) showing dimensions and a cross-section A-A & B-B. The drawing includes a side view and a top view. The side view shows a height of 35mm and a width of 1134mm. The top view shows a length of 1096mm and a width of 1134mm. The module is mounted on a frame with 4-Øx14 mounting slots. The cross-section A-A & B-B shows a height of 35mm and a width of 33mm.

210R N-type Monofacial Module (66)



Power Range
595W ~ 615W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.77%

Structure Performance	
Solar Cell Type	210R N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	132pcs(6×22)
Module Dimension	2382×1134×35mm
Weight	32.8kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs
Per Container(40'HQ)	496pcs

(Unit: mm)

Technical drawing of the 210R N-type Monofacial Module (66) showing dimensions and a cross-section A-A & B-B. The drawing includes a side view and a top view. The side view shows a height of 35mm and a width of 1134mm. The top view shows a length of 1096mm and a width of 1134mm. The module is mounted on a frame with 4-Øx14 mounting slots. The cross-section A-A & B-B shows a height of 35mm and a width of 33mm.

Electrical Performance Parameters											
Model Type	545C(HPM)60(210R)		550C(HPM)60(210R)		555C(HPM)60(210R)		560C(HPM)60(210R)		565C(HPM)60(210R)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	545	411	550	415	555	419	560	423	565	427
Max. Power Voltage	V _{MPP} (V)	36.44	34.17	36.58	34.30	36.72	34.43	36.86	34.56	37.00	34.69
Max. Power Current	I _{MPP} (A)	14.96	12.03	15.04	12.10	15.12	12.17	15.20	12.24	15.28	12.31
Open Circuit Voltage	V _{OC} (V)	44.11	41.86	44.24	41.98	44.36	42.10	44.48	42.22	44.60	42.34
Short Circuit Current	I _{SC} (A)	15.86	12.79	15.95	12.86	16.04	12.93	16.12	13.00	16.21	13.07
Module Efficiency	(%)	22.13		22.33		22.53		22.74		22.94	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Electrical Performance Parameters											
Model Type	595C(HPM)66(210R)		600C(HPM)66(210R)		605C(HPM)66(210R)		610C(HPM)66(210R)		615C(HPM)66(210R)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	595	448	600	452	605	456	610	460	615	464
Max. Power Voltage	V _{MPP} (V)	40.05	37.43	40.17	37.58	40.30	37.75	40.43	37.90	40.55	38.07
Max. Power Current	I _{MPP} (A)	14.86	11.97	14.94	12.03	15.02	12.08	15.09	12.14	15.17	12.19
Open Circuit Voltage	V _{OC} (V)	48.04	45.58	48.17	45.71	48.30	45.83	48.44	45.96	48.57	46.09
Short Circuit Current	I _{SC} (A)	15.71	12.67	15.79	12.75	15.88	12.82	15.97	12.89	16.06	12.96
Module Efficiency	(%)	22.03		22.21		22.40		22.58		22.77	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (565C)

Current-Voltage & Power-Voltage Curve (565C) graph showing Current (A) and Power (W) vs Voltage (V) for various irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The graph shows that as irradiance increases, the current and power also increase. The power curve peaks at approximately 44V for 1000W/m².

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{SC})	+0.043%
Temperature Coefficient (V _{OC})	-0.25%
Temperature Coefficient (P _{MAX})	-0.30%

Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	35A

Current-Voltage & Power-Voltage Curve (615C)

Current-Voltage & Power-Voltage Curve (615C) graph showing Current (A) and Power (W) vs Voltage (V) for various irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The graph shows that as irradiance increases, the current and power also increase. The power curve peaks at approximately 44V for 1000W/m².

Temperature Characteristics


Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{SC})	+0.043%
Temperature Coefficient (V _{OC})	-0.25%
Temperature Coefficient (P _{MAX})	-0.30%

Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	35A

14


210R N-type Bifacial Module (66)



Power Range
595W ~ 615W




Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.77%


Structure Performance	
Solar Cell Type	210R N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	132pcs(6x22)
Module Dimension	2382×1134×30mm
Weight	32.5kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	576pcs

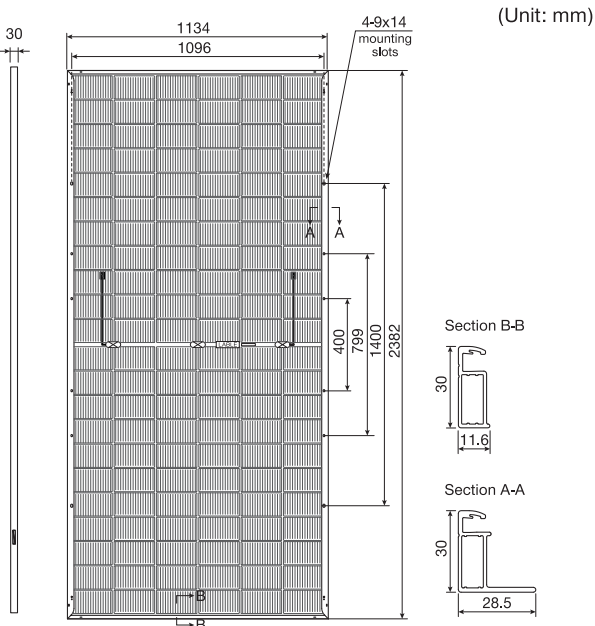

Electrical Performance Parameters										
Model Type	595C(HBD)66(210R)		600C(HBD)66(210R)		605C(HBD)66(210R)		610C(HBD)66(210R)		615C(HBD)66(210R)	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)	595	448	600	452	605	456	610	460	615
Max. Power Voltage	V _{MPP} (V)	40.26	37.62	40.38	37.77	40.51	37.94	40.64	38.10	40.76
Max. Power Current	I _{MPP} (A)	14.78	11.91	14.86	11.97	14.94	12.02	15.01	12.08	15.09
Open Circuit Voltage	V _{OC} (V)	48.29	45.82	48.42	45.95	48.55	46.07	48.69	46.20	48.82
Short Circuit Current	I _{SC} (A)	15.63	12.60	15.71	12.68	15.80	12.75	15.89	12.82	15.98
Module Efficiency	(%)	22.03		22.21		22.40		22.58		22.77

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (615C)

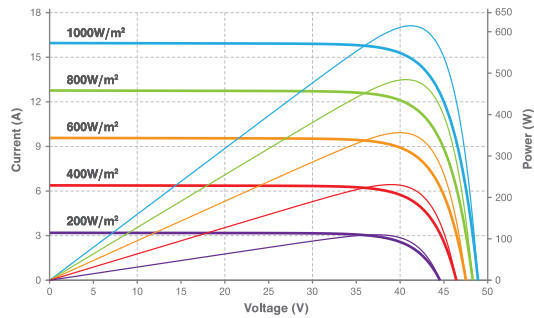

Bifacial Output-rearside Power Gain						
5%	Maximum Power	P _{MAX} (W)	625	630	635	641
	Module Efficiency	(%)	23.13	23.32	23.52	23.71
10%	Maximum Power	P _{MAX} (W)	655	660	666	671
	Module Efficiency	(%)	24.23	24.43	24.64	24.84
25%	Maximum Power	P _{MAX} (W)	744	750	756	763
	Module Efficiency	(%)	27.53	27.77	28.00	28.23

Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{OC})	-0.25%
Temperature Coefficient (I _{SC})	+0.043%	Temperature Coefficient (P _{MAX})	-0.30%



Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	35A



Pure Black series

Elegant Aesthetics,Sleek Integration

The SanoPower Solar Pure Black Series combines cutting-edge technology with minimalist design to seamlessly blend into modern architectural environments. Crafted for premium visual appeal,this series adopts 182mm wafers and TOPCon technology,ensuring high efficiency while maintaining a uniform, deep-black appearance.Its refined aesthetics and seamless integration empower buildings with both sophistication and sustainable energy performance.

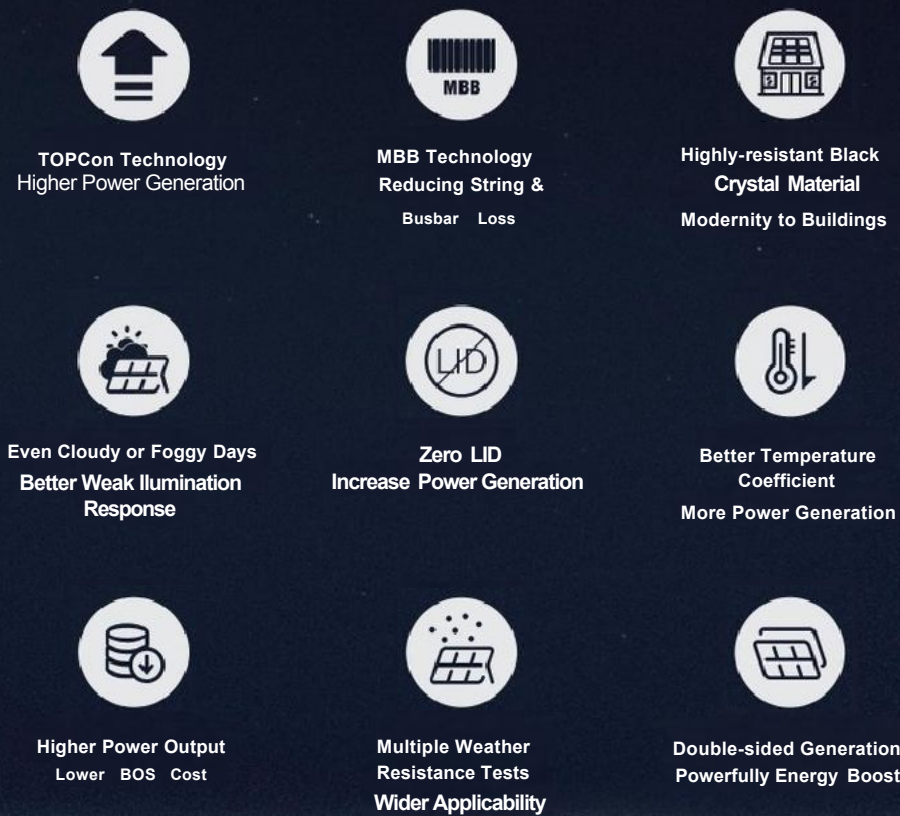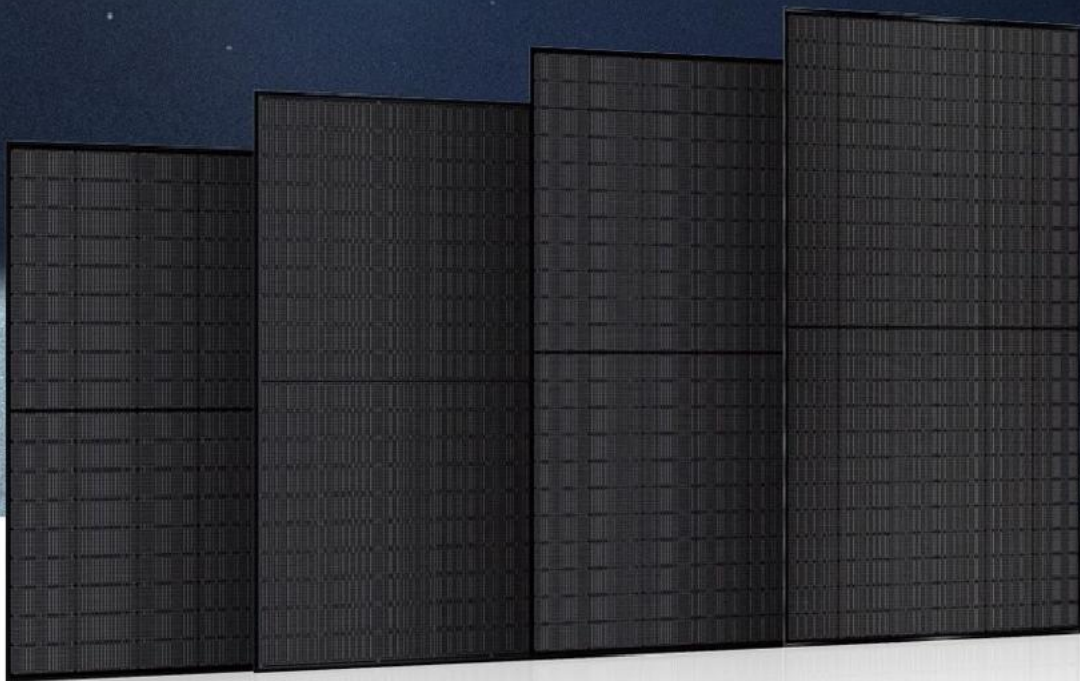

Power Range
400W ~ 635W

Maximum Efficiency
22.72%

12 years product
workmanship warranty

25/30 years linear power
output warranty

1% 1st-year degradation
0.40% annual degradation

Pure Black Series Mainstream Products

Product	Power (W)	Maximum Efficiency	Size (mm)
182 N-type (54) Pure Black single glass	415 - 435	22.28%	1722x1134x30
182 N-type (54) Pure Black double glass	420 - 435		
182 N-type (60) Pure Black single glass	465 - 485	22.40%	1909x1134x30
182 N-type (60) Pure Black double glass	470 - 485		
182 N-type (66) Pure Black single glass	515 - 535	22.53%	2094x1134x30
182 N-type (66) Pure Black double glass	520 - 535		
182 N-type (72) Pure Black single glass	565 - 585	22.65%	2278x1134x30
182 N-type (72) Pure Black double glass	570 - 585		
182 N-type (78) Pure Black double glass	620 - 635	22.72%	2465x1134x30
182 N-type (54) Pure Black bifacial single glass	415 - 435	22.28%	1722x1134x30
182 P-type (54) Pure Black single glass	400 - 410	21.00%	1722x1134x30
182 P-type (60) Pure Black single glass	445 - 455	21.02%	1909x1134x30
182 P-type (66) Pure Black single glass	490 - 500	21.06%	2094x1134x30
182 P-type (72) Pure Black single glass	535 - 545	21.10%	2278x1134x30

Note: see datasheet for details


182 Pure Black N-type Monofacial Module (54)

Power Range
415W ~ 435W

Power Output Tolerance
0W ~ +5W

Maximum Efficiency
22.28%


Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	108pcs(6×18)
Module Dimension	1722×1134×30mm
Weight	20.7kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	Black
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+), landscape 1400mm (+) 200mm (-), Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	936pcs

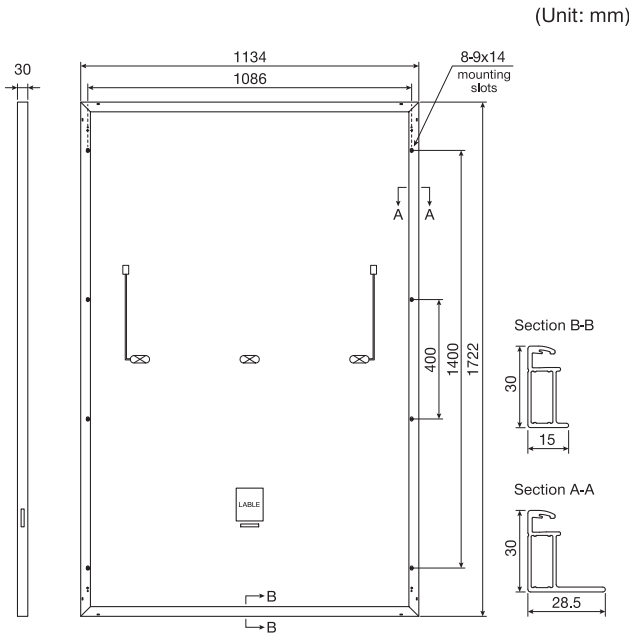

Electrical Performance Parameters										
Model Type	415C(BPM)54(182)		420C(BPM)54(182)		425C(BPM)54(182)		430C(BPM)54(182)		435C(BPM)54(182)	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{max} (W)	415	312	420	316	425	320	430	323	435
Max. Power Voltage	V _{MP} (V)	31.64	29.52	31.82	29.68	32.01	29.86	32.20	29.91	32.38
Max. Power Current	I _{MP} (A)	13.12	10.57	13.20	10.65	13.28	10.72	13.36	10.80	13.44
Open Circuit Voltage	V _{OC} (V)	38.20	36.29	38.39	36.47	38.58	36.68	38.77	36.79	38.96
Short Circuit Current	I _{SC} (A)	13.89	11.21	13.97	11.28	14.05	11.35	14.13	11.42	14.21
Module Efficiency	(%)	21.25		21.51		21.76		22.02		22.28

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (435C)

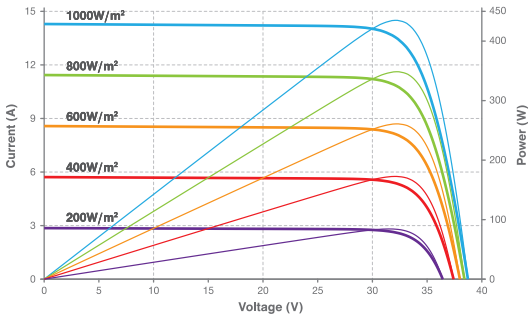


Temperature Characteristics

Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{sc})	+0.043%
Temperature Coefficient (V _{oc})	-0.25%
Temperature Coefficient (P _{max})	-0.30%


Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A


182 Pure Black N-type Monofacial Module (60)



Power Range
465W ~ 485W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.40%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	1909×1134×30mm
Weight	22.1kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	Black
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+), landscape 1400mm (+) 200mm (-), 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	864pcs

(Unit: mm)

Technical drawing of the 182 Pure Black N-type Monofacial Module (60) showing front, side, and section views with dimensions.


182 Pure Black N-type Monofacial Module (66)



Power Range
515W ~ 535W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.53%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	132pcs(6×22)
Module Dimension	2094×1134×30mm
Weight	24.0kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	Black
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+), landscape 1400mm (+) 200mm (-), 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	792pcs

(Unit: mm)

Technical drawing of the 182 Pure Black N-type Monofacial Module (66) showing front, side, and section views with dimensions.

Electrical Performance Parameters											
Model Type	465C(BPM)60(182)		470C(BPM)60(182)		475C(BPM)60(182)		480C(BPM)60(182)		485C(BPM)60(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	465	350	470	354	475	358	480	362	485	366
Max. Power Voltage	V _{MPP} (V)	34.81	32.78	34.98	32.97	35.14	33.15	35.30	33.34	35.46	33.51
Max. Power Current	I _{MPP} (A)	13.36	10.68	13.44	10.74	13.52	10.80	13.60	10.86	13.68	10.93
Open Circuit Voltage	V _{OC} (V)	41.93	39.89	42.09	40.05	42.25	40.21	42.42	40.37	42.48	40.53
Short Circuit Current	I _{SC} (A)	14.11	11.42	14.19	11.49	14.28	11.56	14.36	11.63	14.44	11.70
Module Efficiency	(%)	21.48		21.71		21.94		22.17		22.40	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Electrical Performance Parameters											
Model Type	515C(BPM)66(182)		520C(BPM)66(182)		525C(BPM)66(182)		530C(BPM)66(182)		535C(BPM)66(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	515	387	520	391	525	395	530	399	535	403
Max. Power Voltage	V _{MPP} (V)	38.32	36.21	38.47	36.38	38.61	36.55	38.75	36.71	38.89	36.88
Max. Power Current	I _{MPP} (A)	13.44	10.69	13.52	10.75	13.60	10.81	13.68	10.87	13.76	10.93
Open Circuit Voltage	V _{OC} (V)	45.93	43.61	45.98	43.75	46.03	43.89	46.08	44.03	46.13	44.17
Short Circuit Current	I _{SC} (A)	14.17	11.49	14.26	11.56	14.34	11.63	14.42	11.70	14.50	11.77
Module Efficiency	(%)	21.69		21.90		22.11		22.32		22.53	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (485C)

Current-Voltage & Power-Voltage Curve (485C) graph showing I-V and P-V curves for various irradiance levels from 200W/m² to 1000W/m².

Temperature Characteristics		
Nominal Module Operating Temperature		44±2°C
Temperature Coefficient (I _{SC})		+0.043%
Temperature Coefficient (V _{OC})		-0.25%
Temperature Coefficient (P _{MAX})		-0.30%

Maximum Parameters		
Working Temperature		-40~+85°C
Maximum System Voltage		1500V DC
Nominal Maximum Fuse Current		25A

Current-Voltage & Power-Voltage Curve (535C)

Current-Voltage & Power-Voltage Curve (535C) graph showing I-V and P-V curves for various irradiance levels from 200W/m² to 1000W/m².

Temperature Characteristics		
Nominal Module Operating Temperature		44±2°C
Temperature Coefficient (I _{SC})		+0.043%
Temperature Coefficient (V _{OC})		-0.25%
Temperature Coefficient (P _{MAX})		-0.30%

Maximum Parameters		
Working Temperature		-40~+85°C
Maximum System Voltage		1500V DC
Nominal Maximum Fuse Current		25A

18


182 Pure Black N-type Monofacial Module (72)



Power Range
565W ~ 585W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.65%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	144pcs(6×24)
Module Dimension	2278×1134×30mm
Weight	26.9kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	Black
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	720pcs

(Unit: mm)

Electrical Performance Parameters										
Model Type	565C(BPM)72(182)		570C(BPM)72(182)		575C(BPM)72(182)		580C(BPM)72(182)		585C(BPM)72(182)	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)		565	425	570	429	575	433	580	437
Max. Power Voltage	V _{MPP} (V)		42.33	39.80	42.48	39.95	42.63	40.10	42.78	40.24
Max. Power Current	I _{MPP} (A)		13.35	10.68	13.42	10.74	13.49	10.80	13.56	10.86
Open Circuit Voltage	V _{OC} (V)		50.86	48.31	51.00	48.45	51.15	48.58	51.29	48.71
Short Circuit Current	I _{SC} (A)		14.11	11.38	14.18	11.44	14.26	11.51	14.34	11.57
Module Efficiency	(%)		21.87		22.07		22.26		22.45	
									22.65	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (585C)

Temperature Characteristics	
Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{sc})	+0.043%
Temperature Coefficient (V _{oc})	-0.25%
Temperature Coefficient (P _{MAX})	-0.30%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A

182 Pure Black N-type Bifacial Module (54)



Power Range
420W ~ 435W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.28%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	108pcs(6×18)
Module Dimension	1722×1134×30mm
Weight	23.1kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	936pcs

(Unit: mm)

Electrical Performance Parameters								
Model Type	420C(BBD)54(182)		425C(BBD)54(182)		430C(BBD)54(182)		435C(BBD)54(182)	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)		420	315	425	319	430	323
Max. Power Voltage	V _{MPP} (V)		31.23	29.44	31.46	29.65	31.69	29.86
Max. Power Current	I _{MPP} (A)		13.45	10.70	13.51	10.76	13.57	10.82
Open Circuit Voltage	V _{OC} (V)		36.75	34.28	36.95	34.47	37.15	34.66
Short Circuit Current	I _{SC} (A)		14.70	11.92	14.76	11.97	14.82	12.02
Module Efficiency	(%)		21.51		21.76		22.02	
							22.28	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.


Current-Voltage & Power-Voltage Curve (435C)

Bifacial Output-rearside Power Gain					
5%	Maximum Power	P _{MAX} (W)	441	446	452
	Module Efficiency	(%)	22.58	22.85	23.12
10%	Maximum Power	P _{MAX} (W)	462	468	473
	Module Efficiency	(%)	23.66	23.94	24.22
25%	Maximum Power	P _{MAX} (W)	525	531	538
	Module Efficiency	(%)	26.89	27.21	27.53


Temperature Characteristics				Maximum Parameters	
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{oc})	-0.25%	Working Temperature	-40~+85°C
Temperature Coefficient (I _{sc})	+0.043%	Temperature Coefficient (P _{MAX})	-0.30%	Maximum System Voltage	1500V DC
				Nominal Maximum Fuse Current	30A

19


182 Pure Black N-type Bifacial Module (60)



Power Range
470W ~ 485W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.40%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	1909×1134×30mm
Weight	25.7kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm ² , portrait ^{400mm (+)} / _{200mm (-)} , landscape ^{1400mm (+)} / _{1400mm (-)} Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	864pcs

(Unit: mm)

Technical drawing of the 182 Pure Black N-type Bifacial Module (60) showing dimensions and cross-sections. The main dimensions are 1134mm (width) and 1909mm (height). The width is divided into 1086mm (cell area) and 48mm (margin). The height is divided into 1400mm (cell area) and 509mm (margin). The module is shown with 8-9x14 mounting slots. Cross-sections A-A and B-B are provided, showing the 30mm thickness and 11.6mm and 28.5mm internal dimensions.

Electrical Performance Parameters									
Model Type	470C(BBD)60(182)		475C(BBD)60(182)		480C(BBD)60(182)		485C(BBD)60(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	470	353	475	357	480	361	485	365
Max. Power Voltage	V _{MPP} (V)	34.85	32.87	35.06	33.06	35.27	33.25	35.49	33.44
Max. Power Current	I _{MPP} (A)	13.49	10.74	13.55	10.80	13.61	10.86	13.67	10.92
Open Circuit Voltage	V _{OC} (V)	41.42	38.92	41.62	39.11	41.82	39.29	42.02	39.48
Short Circuit Current	I _{SC} (A)	14.58	11.86	14.64	11.91	14.70	11.96	14.76	12.01
Module Efficiency	(%)	21.71		21.94		22.17		22.40	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (485C)


Current-Voltage & Power-Voltage Curve (485C) graph showing I-V and P-V curves for various irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The x-axis represents Voltage (V) from 0 to 45, and the y-axis represents Current (A) from 0 to 16 and Power (W) from 0 to 500.

Bifacial Output-rearside Power Gain						
5%	Maximum Power	P _{MAX} (W)	494	499	504	509
	Module Efficiency	(%)	22.80	23.04	23.28	23.52
10%	Maximum Power	P _{MAX} (W)	517	523	528	534
	Module Efficiency	(%)	23.88	24.14	24.39	24.64
25%	Maximum Power	P _{MAX} (W)	588	594	600	606
	Module Efficiency	(%)	27.14	27.43	27.72	28.00


Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{OC})	-0.25%
Temperature Coefficient (I _{SC})	+0.043%	Temperature Coefficient (P _{MAX})	-0.30%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A


182 Pure Black N-type Bifacial Module (66)



Power Range
520W ~ 535W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.53%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	132pcs(6x22)
Module Dimension	2094×1134×30mm
Weight	28.4kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm ² , portrait ^{400mm (+)} / _{200mm (-)} , landscape ^{1400mm (+)} / _{1400mm (-)} Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	792pcs

(Unit: mm)

Technical drawing of the 182 Pure Black N-type Bifacial Module (66) showing dimensions and cross-sections. The main dimensions are 1134mm (width) and 2094mm (height). The width is divided into 1086mm (cell area) and 48mm (margin). The height is divided into 1400mm (cell area) and 694mm (margin). The module is shown with 8-9x14 mounting slots. Cross-sections A-A and B-B are provided, showing the 30mm thickness and 11.6mm and 28.5mm internal dimensions.

Electrical Performance Parameters									
Model Type	520C(BBD)66(182)		525C(BBD)66(182)		530C(BBD)66(182)		535C(BBD)66(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	520	390	525	394	530	398	535	402
Max. Power Voltage	V _{MPP} (V)	38.46	36.18	38.66	36.35	38.86	36.52	39.05	36.69
Max. Power Current	I _{MPP} (A)	13.53	10.78	13.59	10.84	13.65	10.90	13.71	10.96
Open Circuit Voltage	V _{OC} (V)	46.09	43.55	46.29	43.74	46.49	43.93	46.69	44.12
Short Circuit Current	I _{SC} (A)	14.46	11.70	14.52	11.75	14.58	11.80	14.64	11.85
Module Efficiency	(%)	21.90		22.11		22.32		22.53	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (535C)

Current-Voltage & Power-Voltage Curve (535C) graph showing I-V and P-V curves for various irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The x-axis represents Voltage (V) from 0 to 50, and the y-axis represents Current (A) from 0 to 16 and Power (W) from 0 to 550.


Bifacial Output-rearside Power Gain						
5%	Maximum Power	P _{MAX} (W)	546	551	557	562
	Module Efficiency	(%)	22.99	23.21	23.44	23.66
10%	Maximum Power	P _{MAX} (W)	572	578	583	589
	Module Efficiency	(%)	24.09	24.32	24.55	24.78
25%	Maximum Power	P _{MAX} (W)	650	656	663	669
	Module Efficiency	(%)	27.37	27.64	27.90	28.16

Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{OC})	-0.25%
Temperature Coefficient (I _{SC})	+0.043%	Temperature Coefficient (P _{MAX})	-0.30%


Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A

20


182 Pure Black N-type Bifacial Module (72)



Power Range
570W ~ 585W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.65%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	144pcs(6×24)
Module Dimension	2278×1134×30mm
Weight	31.2kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	720pcs

(Unit: mm)

Technical drawing of the 182 Pure Black N-type Bifacial Module (72) showing dimensions and cross-sections. The main dimensions are 1134mm width, 2278mm height, and 30mm thickness. The width is divided into 1086mm and 48mm sections. The height is divided into 1400mm and 878mm sections. The drawing includes cross-sections A-A and B-B, showing the internal structure and the 8-9x14 mounting slots.

Electrical Performance Parameters									
Model Type	570C(BBD)72(182)		575C(BBD)72(182)		580C(BBD)72(182)		585C(BBD)72(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P_{MAX} (W)	570	429	575	433	580	437	585	441
Max. Power Voltage	V_{MP} (V)	42.20	39.69	42.35	39.80	42.50	39.91	42.65	40.02
Max. Power Current	I_{MP} (A)	13.51	10.81	13.58	10.88	13.65	10.95	13.72	11.02
Open Circuit Voltage	V_{OC} (V)	50.73	48.18	50.92	48.37	51.12	48.56	51.32	48.75
Short Circuit Current	I_{SC} (A)	14.30	11.53	14.36	11.58	14.42	11.63	14.48	11.68
Module Efficiency	(%)	22.07		22.26		22.45		22.65	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (585C)

Current-Voltage & Power-Voltage Curve (585C) graph showing I-V and P-V curves for different irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The x-axis represents Voltage (V) from 0 to 55, and the y-axis represents Current (A) from 0 to 15 and Power (W) from 0 to 600.

Bifacial Output-rearside Power Gain

5%	Maximum Power	P_{MAX} (W)	599	604	609	614
	Module Efficiency	(%)	23.17	23.37	23.57	23.78
10%	Maximum Power	P_{MAX} (W)	627	633	638	644
	Module Efficiency	(%)	24.27	24.48	24.70	24.91
25%	Maximum Power	P_{MAX} (W)	713	719	725	731
	Module Efficiency	(%)	27.58	27.82	28.07	28.31


Temperature Characteristics

Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V_{OC})	-0.25%
Temperature Coefficient (I_{SC})	+0.043%	Temperature Coefficient (P_{MAX})	-0.30%

Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A


182 Pure Black N-type Bifacial Module (78)



Power Range
620W ~ 635W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.72%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	156pcs(6×26)
Module Dimension	2465×1134×30mm
Weight	33.5kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	576pcs

(Unit: mm)

Technical drawing of the 182 Pure Black N-type Bifacial Module (78) showing dimensions and cross-sections. The main dimensions are 1134mm width, 2465mm height, and 30mm thickness. The width is divided into 1096mm and 38mm sections. The height is divided into 1400mm and 1065mm sections. The drawing includes cross-sections A-A and B-B, showing the internal structure and the 4-9x14 mounting slots.

Electrical Performance Parameters									
Model Type	620C(BBD)78(182)		625C(BBD)78(182)		630C(BBD)78(182)		635C(BBD)78(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P_{MAX} (W)	620	466	625	470	630	474	635	478
Max. Power Voltage	V_{MP} (V)	45.86	43.11	45.99	43.23	46.12	43.35	46.25	43.48
Max. Power Current	I_{MP} (A)	13.52	10.81	13.59	10.87	13.66	10.93	13.73	10.99
Open Circuit Voltage	V_{OC} (V)	55.12	52.36	55.27	52.50	55.42	52.64	55.56	52.77
Short Circuit Current	I_{SC} (A)	14.35	11.57	14.43	11.64	14.51	11.70	14.59	11.76
Module Efficiency	(%)	22.18		22.36		22.54		22.72	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (635C)

Current-Voltage & Power-Voltage Curve (635C) graph showing I-V and P-V curves for different irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The x-axis represents Voltage (V) from 0 to 60, and the y-axis represents Current (A) from 0 to 15 and Power (W) from 0 to 650.

Bifacial Output-rearside Power Gain

5%	Maximum Power	P_{MAX} (W)	651	656	662	667
	Module Efficiency	(%)	23.29	23.48	23.66	23.85
10%	Maximum Power	P_{MAX} (W)	682	688	693	699
	Module Efficiency	(%)	24.40	24.59	24.79	24.99
25%	Maximum Power	P_{MAX} (W)	775	781	788	794
	Module Efficiency	(%)	27.73	27.95	28.17	28.40

Temperature Characteristics


Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V_{OC})	-0.25%
Temperature Coefficient (I_{SC})	+0.043%	Temperature Coefficient (P_{MAX})	-0.30%

Maximum Parameters


Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A

21


182 Pure Black N-type Bifacial Single Glass Module (54)



Power Range
415W ~ 435W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
22.28%

Structure Performance	
Solar Cell Type	182mm N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	108pcs(6×18)
Module Dimension	1722×1134×30mm
Weight	20.7kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 200mm (-) , Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	936pcs

(Unit: mm)

Electrical Performance Parameters											
Model Type	415C(HBB)54(182)		420C(HBB)54(182)		425C(HBB)54(182)		430C(HBB)54(182)		435C(HBB)54(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	415	311	420	315	425	319	430	323	435	327
Max. Power Voltage	V _{MPP} (V)	31.00	29.23	31.23	29.44	31.46	29.65	31.69	29.86	31.92	30.07
Max. Power Current	I _{MPP} (A)	13.39	10.64	13.45	10.70	13.51	10.76	13.57	10.82	13.63	10.88
Open Circuit Voltage	V _{OC} (V)	39.68	34.10	39.83	34.28	39.98	34.47	40.13	34.66	40.28	34.85
Short Circuit Current	I _{SC} (A)	14.64	11.87	14.70	11.92	14.76	11.97	14.82	12.02	14.88	12.07
Module Efficiency	(%)	21.25		21.51		21.76		22.02		22.28	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.


Current-Voltage & Power-Voltage Curve (435C)

Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{OC})	-0.25%
Temperature Coefficient (I _{SC})	+0.043%	Temperature Coefficient (P _{MAX})	-0.30%


Bifacial Output-rearside Power Gain							
5%	Maximum Power	P _{MAX} (W)	436	441	446	452	457
	Module Efficiency	(%)	22.31	22.58	22.85	23.12	23.39
10%	Maximum Power	P _{MAX} (W)	457	462	468	473	479
	Module Efficiency	(%)	23.38	23.66	23.94	24.22	24.50
25%	Maximum Power	P _{MAX} (W)	519	525	531	538	544
	Module Efficiency	(%)	26.57	26.89	27.21	27.53	27.85

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A


182 Pure Black P-type Monofacial Module (54)



Power Range
400W ~ 410W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.00%

Structure Performance	
Solar Cell Type	182mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	108pcs(6×18)
Module Dimension	1722×1134×30mm
Weight	20.7kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	Black
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 200mm (-) , Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	936pcs

(Unit: mm)

Electrical Performance Parameters											
Model Type	400D(BPM)54(182)		405D(BPM)54(182)		410D(BPM)54(182)						
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT					
Nominal Max. Power	P _{MAX} (W)	400	280	405	285	410	290				
Max. Power Voltage	V _{MPP} (V)	31.02	27.30	31.22	27.62	31.42	27.90				
Max. Power Current	I _{MPP} (A)	12.90	10.26	12.98	10.32	13.05	10.40				
Open Circuit Voltage	V _{OC} (V)	36.90	34.40	37.10	34.60	37.30	34.80				
Short Circuit Current	I _{SC} (A)	13.65	11.39	13.70	11.59	13.75	11.79				
Module Efficiency	(%)	20.48		20.74		21.00					

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.


Current-Voltage & Power-Voltage Curve (410D)

Temperature Characteristics	
Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{SC})	+0.048%
Temperature Coefficient (V _{OC})	-0.26%
Temperature Coefficient (P _{MAX})	-0.34%


Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A

22


182 Pure Black P-type Monofacial Module (60)



Power Range
445W ~ 455W



Power Output Tolerance
0W ~ +5W




Maximum Efficiency
21.02%


Structure Performance	
Solar Cell Type	182mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	1909×1134×30mm
Weight	22.1kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	Black
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	864pcs

(Unit: mm)


182 Pure Black P-type Monofacial Module (66)



Power Range
490W ~ 500W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.06%

Structure Performance	
Solar Cell Type	182mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	132pcs(6×22)
Module Dimension	2094×1134×30mm
Weight	24kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	Black
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	792pcs

(Unit: mm)

Electrical Performance Parameters							
Model Type	445D(BPM)60(182)		450D(BPM)60(182)		455D(BPM)60(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	445	325	450	330	455	335
Max. Power Voltage	V _{MPP} (V)	34.42	31.44	34.62	31.64	34.82	31.84
Max. Power Current	I _{MPP} (A)	12.93	10.34	13.00	10.43	13.07	10.53
Open Circuit Voltage	V _{OC} (V)	41.18	38.68	41.38	38.88	41.58	39.08
Short Circuit Current	I _{SC} (A)	13.66	10.97	13.72	11.17	13.78	11.37
Module Efficiency	(%)	20.56		20.79		21.02	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Electrical Performance Parameters							
Model Type	490D(BPM)66(182)		495D(BPM)66(182)		500D(BPM)66(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	490	370	495	375	500	380
Max. Power Voltage	V _{MPP} (V)	37.82	34.84	38.02	35.04	38.22	35.24
Max. Power Current	I _{MPP} (A)	12.96	10.62	13.02	10.71	13.09	10.79
Open Circuit Voltage	V _{OC} (V)	45.78	42.98	45.98	43.03	46.18	43.08
Short Circuit Current	I _{SC} (A)	13.62	10.92	13.67	11.12	13.72	11.32
Module Efficiency	(%)	20.64		20.85		21.06	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (455D)

Temperature Characteristics	
Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{SC})	+0.048%
Temperature Coefficient (V _{OC})	-0.26%
Temperature Coefficient (P _{MAX})	-0.34%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A


Current-Voltage & Power-Voltage Curve (500D)

Temperature Characteristics	
Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{SC})	+0.048%
Temperature Coefficient (V _{OC})	-0.26%
Temperature Coefficient (P _{MAX})	-0.34%


Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A

23

182 Pure Black P-type Monofacial Module (72)



Power Range
535W ~ 545W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.10%

Structure Performance	
Solar Cell Type	182mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	144pcs(6×24)
Module Dimension	2278×1134×30mm
Weight	26.9kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	Black
Frame	Anodized Aluminum Alloy (Black)
Junction Box	IP68 rated
Cable	4mm², portrait 400mm(+), landscape 1400mm(+) 200mm(+), 1400mm(+) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	720pcs

(Unit: mm)

Electrical Performance Parameters							
Model Type		535D(BPM)72(182)		540D(BPM)72(182)		545D(BPM)72(182)	
		STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)	535	400	540	405	545	410
Max. Power Voltage	V _{MPP} (V)	41.24	38.24	41.44	38.44	41.64	38.64
Max. Power Current	I _{MPP} (A)	12.98	10.47	13.04	10.54	13.09	10.62
Open Circuit Voltage	V _{OC} (V)	50.38	47.88	50.58	48.08	50.78	48.28
Short Circuit Current	I _{SC} (A)	13.64	11.02	13.69	11.07	13.74	11.12
Module Efficiency	(%)	20.71		20.90		21.10	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (545D)

Temperature Characteristics	
Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{SC})	+0.048%
Temperature Coefficient (V _{OC})	-0.26%
Temperature Coefficient (P _{MAX})	-0.34%


Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A

24

P series




Robust Performance, Proven Reliability

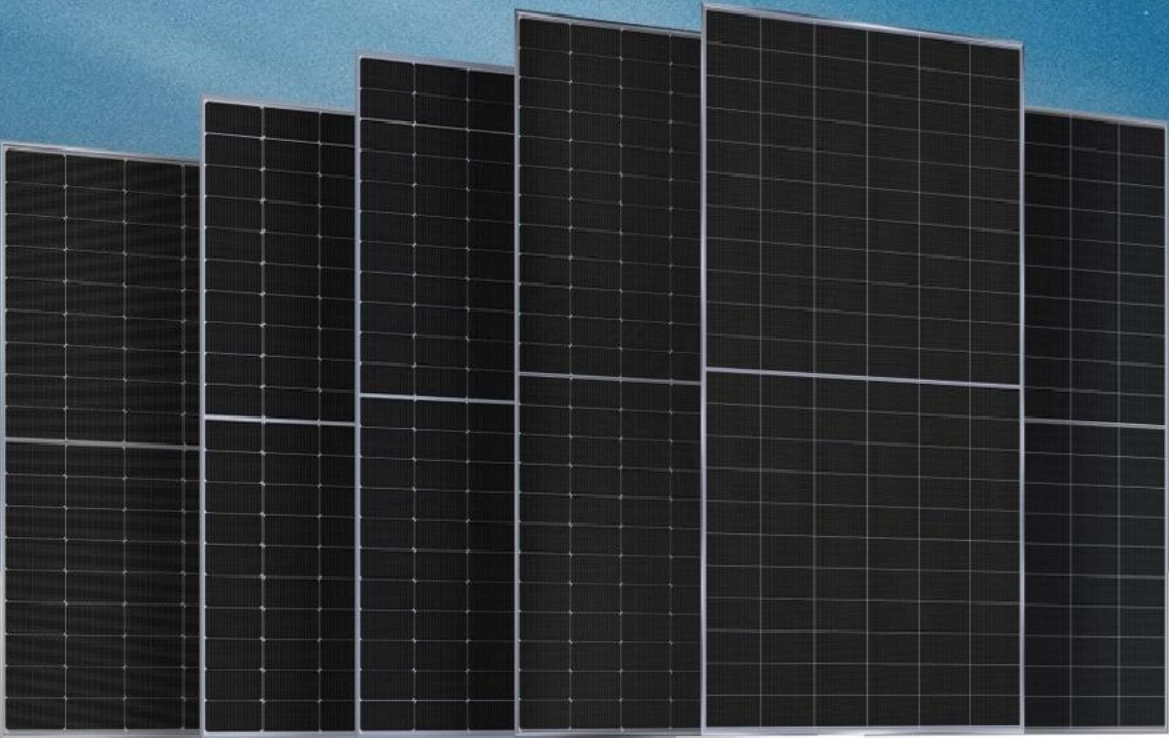The SanoPower Solar P Series utilizes MBB (multi-busbar) and half-cell technology to achieve a maximum efficiency of 21.48%. Engineered for resilience, it offers enhanced shade resistance and minimized hot spot risks. Its optimized series-parallel circuit design reduces internal resistance (R_s), enabling higher power output and lower balance of system (BOS) costs—ideal for projects demanding reliability and cost-efficiency.



Power Range
405W ~ 665W

Maximum Efficiency
21.48%

-  12 years product workmanship warranty
-  25/30 years linear power output warranty
-  2% 1st-year degradation
0.55% annual degradation (monofacial module)
0.45% annual degradation (bifacial module)

P Series Mainstream Products

Product	Power (W)	Maximum Efficiency	Size (mm)
182 P-type (54) single glass	405 - 415	21.25%	1722x1134x30
182 P-type (54) double glass			
182 P-type (60) single glass	450 - 460	21.25%	1909x1134x30
182 P-type (60) double glass			
182 P-type (66) single glass	495 - 505	21.27%	2094x1134x30
182 P-type (66) double glass			
182 P-type (72) single glass	545 - 555	21.48%	2278x1134x30
182 P-type (72) double glass			
210 P-type (54) single glass	535 - 545	21.34%	1960x1303x35
210 P-type (54) double glass			
210 P-type (60) single glass	595 - 605	21.38%	2172x1303x35
210 P-type (60) double glass			
210 P-type (66) single glass	655 - 665	21.41%	2384x1303x35
210 P-type (66) double glass			

Note: see datasheet for details


182 P-type Monofacial Module (54)

Power Range
405W ~ 415W

Power Output Tolerance
0W ~ +5W

Maximum Efficiency
21.25%


Structure Performance	
Solar Cell Type	182mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	108pcs(6×18)
Module Dimension	1722×1134×30mm
Weight	20.7kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+), landscape 1400mm (+) 200mm (-) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	936pcs

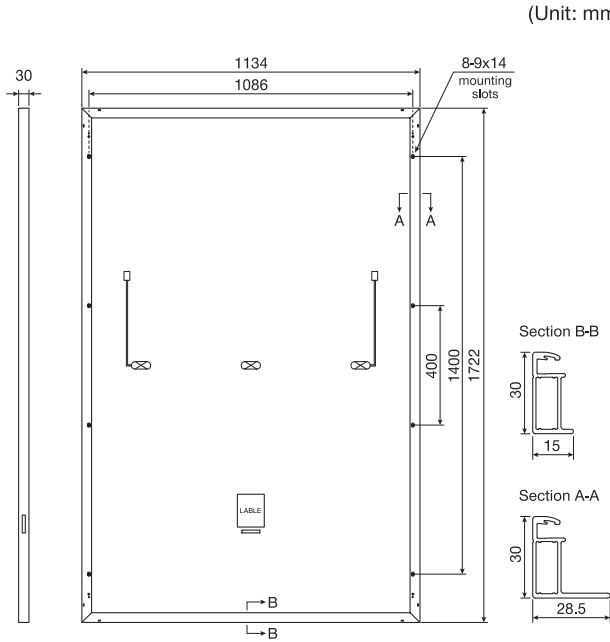

Electrical Performance Parameters							
Model Type		405D(HPM)54(182)		410D(HPM)54(182)		415D(HPM)54(182)	
Testing Condition		STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{MAX} (W)	405	300	410	305	415	310
Max. Power Voltage	V _{MPP} (V)	31.13	28.38	31.32	28.72	31.54	29.09
Max. Power Current	I _{MPP} (A)	13.01	10.58	13.09	10.62	13.16	10.66
Open Circuit Voltage	V _{OC} (V)	37.70	34.98	37.95	35.13	38.10	35.28
Short Circuit Current	I _{SC} (A)	13.87	11.19	13.95	11.24	14.03	11.32
Module Efficiency	(%)	20.74		21.00		21.25	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (415D)

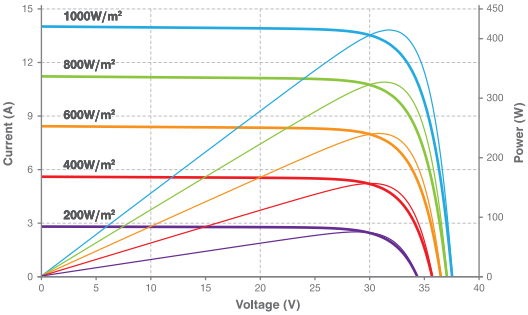

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{sc})	+0.048%
Temperature Coefficient (V _{oc})	-0.26%
Temperature Coefficient (P _{max})	-0.34%


Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A


182 P-type Monofacial Module (60)



Power Range
450W ~ 460W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.25%

Structure Performance	
Solar Cell Type	182mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	1909×1134×30mm
Weight	22.1kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 200mm (-) , 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	864pcs


(Unit: mm)

Technical drawing of the 182 P-type Monofacial Module (60) showing dimensions and cross-sections. The main dimensions are 1134mm (width), 1086mm (usable width), and 1909mm (height). The module features 8-9x14 mounting slots. Cross-sections A-A and B-B are shown, indicating a frame thickness of 30mm and a mounting slot width of 15mm. The module is labeled with 'A', 'B', and 'C' points.


182 P-type Monofacial Module (66)



Power Range
495W ~ 505W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.27%

Structure Performance	
Solar Cell Type	182mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	132pcs(6×22)
Module Dimension	2094×1134×30mm
Weight	24kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 200mm (-) , 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	792pcs

(Unit: mm)

Technical drawing of the 182 P-type Monofacial Module (66) showing dimensions and cross-sections. The main dimensions are 1134mm (width), 1086mm (usable width), and 2094mm (height). The module features 8-9x14 mounting slots. Cross-sections A-A and B-B are shown, indicating a frame thickness of 30mm and a mounting slot width of 15mm. The module is labeled with 'A', 'B', and 'C' points.

Electrical Performance Parameters							
Model Type	450D(HPM)60(182)		455D(HPM)60(182)		460D(HPM)60(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	450	330	455	335	460	340
Max. Power Voltage	V _{MPP} (V)	34.51	31.37	34.73	31.67	34.93	31.96
Max. Power Current	I _{MPP} (A)	13.04	10.52	13.11	10.58	13.18	10.64
Open Circuit Voltage	V _{OC} (V)	41.85	38.87	42.05	39.01	42.25	39.15
Short Circuit Current	I _{SC} (A)	13.90	10.74	13.97	10.79	14.04	10.84
Module Efficiency	(%)	20.79		21.02		21.25	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Electrical Performance Parameters							
Model Type	495D(HPM)66(182)		500D(HPM)66(182)		505D(HPM)66(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	495	375	500	380	505	385
Max. Power Voltage	V _{MPP} (V)	38.20	35.34	38.37	35.51	38.58	35.64
Max. Power Current	I _{MPP} (A)	12.96	10.62	13.03	10.71	13.09	10.81
Open Circuit Voltage	V _{OC} (V)	45.80	42.70	46.00	42.87	46.20	43.03
Short Circuit Current	I _{SC} (A)	13.83	11.23	13.89	11.30	13.95	11.42
Module Efficiency	(%)	20.85		21.06		21.27	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (460D)

Current-Voltage & Power-Voltage Curve (460D) graph showing Current (A) and Power (W) vs Voltage (V) for various irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The graph shows that as irradiance increases, the current increases and the power increases, while the voltage remains relatively constant.

Temperature Characteristics		
Nominal Module Operating Temperature	44±2°C	
Temperature Coefficient (I _{sc})	+0.048%	
Temperature Coefficient (V _{oc})	-0.26%	
Temperature Coefficient (P _{MAX})	-0.34%	

Maximum Parameters		
Working Temperature	-40~+85°C	
Maximum System Voltage	1500V DC	
Nominal Maximum Fuse Current	25A	

Current-Voltage & Power-Voltage Curve (505D)


Current-Voltage & Power-Voltage Curve (505D) graph showing Current (A) and Power (W) vs Voltage (V) for various irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The graph shows that as irradiance increases, the current increases and the power increases, while the voltage remains relatively constant.

Temperature Characteristics		
Nominal Module Operating Temperature	44±2°C	
Temperature Coefficient (I _{sc})	+0.048%	
Temperature Coefficient (V _{oc})	-0.26%	
Temperature Coefficient (P _{MAX})	-0.34%	


Maximum Parameters		
Working Temperature	-40~+85°C	
Maximum System Voltage	1500V DC	
Nominal Maximum Fuse Current	25A	

27


182 P-type Monofacial Module (72)



Power Range
545W ~ 555W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.48%

Structure Performance	
Solar Cell Type	182mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	144pcs(6×24)
Module Dimension	2278×1134×30mm
Weight	26.9kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 200mm (-) , 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	720pcs

(Unit: mm)

Technical drawing of the 182 P-type Monofacial Module (72) showing dimensions and cross-sections. The main dimensions are 1134mm (width), 1086mm (usable width), and 2278mm (height). The module has 8-9x14 mounting slots. Cross-sections A-A and B-B show the internal structure and frame details.

Electrical Performance Parameters							
Model Type	545D(HPM)72(182)		550D(HPM)72(182)		555D(HPM)72(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	545	405	550	409	555	413
Max. Power Voltage	V _{MPP} (V)	41.80	38.25	42.00	38.42	42.17	38.60
Max. Power Current	I _{MPP} (A)	13.04	10.60	13.10	10.65	13.16	10.70
Open Circuit Voltage	V _{OC} (V)	50.15	46.72	50.35	46.84	50.55	46.96
Short Circuit Current	I _{SC} (A)	13.91	11.26	13.97	11.33	14.03	11.40
Module Efficiency	(%)	21.10		21.29		21.48	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (555D)

Graph showing Current (A) and Power (W) versus Voltage (V) for the 555D module. The x-axis represents Voltage (V) from 0 to 55. The left y-axis represents Current (A) from 0 to 15. The right y-axis represents Power (W) from 0 to 600. Five curves are plotted for different irradiance levels: 1000W/m² (blue), 800W/m² (green), 600W/m² (orange), 400W/m² (red), and 200W/m² (purple). The I-V curves show a sharp drop in current at high voltages, while the P-V curves show a peak power point that shifts with irradiance.


Temperature Characteristics	
Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{sc})	+0.048%
Temperature Coefficient (V _{oc})	-0.26%
Temperature Coefficient (P _{MAX})	-0.34%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A

182 P-type Bifacial Module (54)



Power Range
405W ~ 415W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.25%

Structure Performance	
Solar Cell Type	182mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	108pcs(6×18)
Module Dimension	1722×1134×30mm
Weight	23.1kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 200mm (-) , 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	936pcs

(Unit: mm)

Technical drawing of the 182 P-type Bifacial Module (54) showing dimensions and cross-sections. The main dimensions are 1134mm (width), 1086mm (usable width), and 1722mm (height). The module has 8-9x14 mounting slots. Cross-sections A-A and B-B show the internal structure and frame details.

Electrical Performance Parameters							
Model Type	405D(HBD)54(182)		410D(HBD)54(182)		415D(HBD)54(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	405	282	410	287	415	292
Max. Power Voltage	V _{MPP} (V)	31.35	27.12	31.56	27.50	31.78	27.87
Max. Power Current	I _{MPP} (A)	12.92	10.40	12.99	10.44	13.06	10.48
Open Circuit Voltage	V _{OC} (V)	37.08	34.74	37.20	34.86	37.34	35.00
Short Circuit Current	I _{SC} (A)	13.81	11.15	13.88	11.20	13.95	11.26
Module Efficiency	(%)	20.74		21.00		21.25	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (415D)

Graph showing Current (A) and Power (W) versus Voltage (V) for the 415D module. The x-axis represents Voltage (V) from 0 to 40. The left y-axis represents Current (A) from 0 to 15. The right y-axis represents Power (W) from 0 to 450. Five curves are plotted for different irradiance levels: 1000W/m² (blue), 800W/m² (green), 600W/m² (orange), 400W/m² (red), and 200W/m² (purple). The I-V curves show a sharp drop in current at high voltages, while the P-V curves show a peak power point that shifts with irradiance.


Bifacial Output-rearside Power Gain					
5%	Maximum Power	P _{MAX} (W)	425	431	436
	Module Efficiency	(%)	21.78	22.05	22.31
10%	Maximum Power	P _{MAX} (W)	446	451	457
	Module Efficiency	(%)	22.81	23.10	23.38
25%	Maximum Power	P _{MAX} (W)	506	513	519
	Module Efficiency	(%)	25.93	26.25	26.57

Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{oc})	-0.26%
Temperature Coefficient (I _{sc})	+0.048%	Temperature Coefficient (P _{MAX})	-0.34%


Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A

28


182 P-type Bifacial Module (60)



Power Range
450W ~ 460W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.25%

Structure Performance	
Solar Cell Type	182mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	1909×1134×30mm
Weight	25.7kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	864pcs

(Unit: mm)

Technical drawing of the 182 P-type Bifacial Module (60) showing dimensions and cross-sections. The main dimensions are 1134mm width and 1909mm height. The width is divided into 1086mm and 48mm sections. The height is divided into 1400mm and 509mm sections. The module features 8-9x14 mounting slots. Cross-sections A-A and B-B are shown, indicating a 30mm thickness and a 28.5mm width for the frame.

Electrical Performance Parameters							
Model Type	450D(HBD)60(182)		455D(HBD)60(182)		460D(HBD)60(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P_{MAX} (W)	450	322	455	327	460	332
Max. Power Voltage	V_{MP} (V)	34.78	30.91	34.97	31.27	35.17	31.62
Max. Power Current	I_{MP} (A)	12.94	10.42	13.01	10.46	13.08	10.50
Open Circuit Voltage	V_{OC} (V)	41.20	38.90	41.32	39.02	41.46	39.14
Short Circuit Current	I_{SC} (A)	13.83	11.17	13.90	11.22	13.97	11.28
Module Efficiency	(%)	20.79		21.02		21.25	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (460D)


Graph showing Current (A) and Power (W) versus Voltage (V) for the 460D module. The x-axis ranges from 0 to 45V, and the y-axis ranges from 0 to 15A and 0 to 500W. Five curves are plotted for irradiance levels of 1000W/m², 800W/m², 600W/m², 400W/m², and 200W/m². The 1000W/m² curve shows the highest power output, peaking at approximately 460W.

Bifacial Output-rearside Power Gain					
5%	Maximum Power	P_{MAX} (W)	473	478	483
	Module Efficiency	(%)	21.83	22.07	22.31
10%	Maximum Power	P_{MAX} (W)	495	501	506
	Module Efficiency	(%)	22.87	23.12	23.37
25%	Maximum Power	P_{MAX} (W)	563	569	575
	Module Efficiency	(%)	25.98	26.27	26.56


Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V_{OC})	-0.26%
Temperature Coefficient (I_{SC})	+0.048%	Temperature Coefficient (P_{MAX})	-0.34%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A


182 P-type Bifacial Module (66)



Power Range
495W ~ 505W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.27%

Structure Performance	
Solar Cell Type	182mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	132pcs(6×22)
Module Dimension	2094×1134×30mm
Weight	28.4kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	792pcs

(Unit: mm)

Technical drawing of the 182 P-type Bifacial Module (66) showing dimensions and cross-sections. The main dimensions are 1134mm width and 2094mm height. The width is divided into 1086mm and 48mm sections. The height is divided into 1400mm and 694mm sections. The module features 8-9x14 mounting slots. Cross-sections A-A and B-B are shown, indicating a 30mm thickness and a 28.5mm width for the frame.

Electrical Performance Parameters							
Model Type	495D(HBD)66(182)		500D(HBD)66(182)		505D(HBD)66(182)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P_{MAX} (W)	495	367	500	372	505	377
Max. Power Voltage	V_{MP} (V)	38.20	35.16	38.37	35.50	38.55	35.84
Max. Power Current	I_{MP} (A)	12.96	10.44	13.03	10.48	13.10	10.52
Open Circuit Voltage	V_{OC} (V)	45.36	43.06	45.48	43.18	45.62	43.32
Short Circuit Current	I_{SC} (A)	13.85	11.19	13.92	11.24	13.99	11.30
Module Efficiency	(%)	20.85		21.06		21.27	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (505D)

Graph showing Current (A) and Power (W) versus Voltage (V) for the 505D module. The x-axis ranges from 0 to 50V, and the y-axis ranges from 0 to 15A and 0 to 550W. Five curves are plotted for irradiance levels of 1000W/m², 800W/m², 600W/m², 400W/m², and 200W/m². The 1000W/m² curve shows the highest power output, peaking at approximately 505W.


Bifacial Output-rearside Power Gain					
5%	Maximum Power	P_{MAX} (W)	520	525	530
	Module Efficiency	(%)	21.89	22.11	22.33
10%	Maximum Power	P_{MAX} (W)	545	550	556
	Module Efficiency	(%)	22.93	23.16	23.39
25%	Maximum Power	P_{MAX} (W)	619	625	631
	Module Efficiency	(%)	26.06	26.32	26.58

Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V_{OC})	-0.26%
Temperature Coefficient (I_{SC})	+0.048%	Temperature Coefficient (P_{MAX})	-0.34%


Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A

29


182 P-type Bifacial Module (72)



Power Range
545W ~ 555W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.48%

Structure Performance	
Solar Cell Type	182mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	144pcs(6×24)
Module Dimension	2278×1134×30mm
Weight	31.2kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 200mm (-) , Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	36pcs
Per Container(40'HQ)	720pcs

(Unit: mm)

Technical drawing of the 182 P-type Bifacial Module (72) showing dimensions and cross-sections. The main dimensions are 1134mm (width) and 2278mm (height). The width is divided into 1086mm (cell area) and 24mm (margin). The height is divided into 1400mm (cell area) and 400mm (margin). The module has 8-9x14 mounting slots. Cross-sections A-A and B-B are shown, indicating a 30mm thickness and a 28.5mm width for the frame.

Electrical Performance Parameters						
Model Type	545D(HBD)72(182)		550D(HBD)72(182)		555D(HBD)72(182)	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	545	411	550	414	555	417
Max. Power Voltage	41.76	39.00	41.92	39.13	42.08	39.26
Max. Power Current	13.05	10.54	13.12	10.58	13.19	10.62
Open Circuit Voltage	49.89	47.56	49.99	47.75	50.09	47.94
Short Circuit Current	13.94	11.26	14.01	11.31	14.07	11.36
Module Efficiency	21.10		21.29		21.48	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (555D)


Current-Voltage & Power-Voltage Curve (555D) graph showing I-V and P-V curves for different irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The x-axis represents Voltage (V) from 0 to 55, and the y-axis represents Current (A) from 0 to 15 and Power (W) from 0 to 600.

Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (Voc)	-0.26%
Temperature Coefficient (Isc)	+0.048%	Temperature Coefficient (Pmax)	-0.34%


Bifacial Output-rearside Power Gain				
5%	Maximum Power	P _{MAX} (W)	572	578
	Module Efficiency	(%)	22.15	22.36
10%	Maximum Power	P _{MAX} (W)	600	605
	Module Efficiency	(%)	23.21	23.42
25%	Maximum Power	P _{MAX} (W)	681	688
	Module Efficiency	(%)	26.37	26.61

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	25A


210 P-type Monofacial Module (54)



Power Range
535W ~ 545W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.34%

Structure Performance	
Solar Cell Type	210mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	108pcs(6×18)
Module Dimension	1960×1303×35mm
Weight	28.4kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 200mm (-) , Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs
Per Container(40'HQ)	558pcs

(Unit: mm)

Technical drawing of the 210 P-type Monofacial Module (54) showing dimensions and cross-sections. The main dimensions are 1303mm (width) and 1960mm (height). The width is divided into 1255mm (cell area) and 48mm (margin). The height is divided into 1400mm (cell area) and 400mm (margin). The module has 8-9x14 mounting slots. Cross-sections A-A and B-B are shown, indicating a 35mm thickness and a 33mm width for the frame.

Electrical Performance Parameters						
Model Type	535D(HPM)54(210)		540D(HPM)54(210)		545D(HPM)54(210)	
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	535	406	540	410	545	414
Max. Power Voltage	30.49	28.74	30.68	28.94	30.88	29.14
Max. Power Current	17.55	14.13	17.60	14.17	17.65	14.21
Open Circuit Voltage	37.54	34.80	37.74	35.00	37.94	35.20
Short Circuit Current	18.42	14.88	18.46	14.92	18.50	14.96
Module Efficiency	20.95		21.14		21.34	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (545D)


Current-Voltage & Power-Voltage Curve (545D) graph showing I-V and P-V curves for different irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The x-axis represents Voltage (V) from 0 to 40, and the y-axis represents Current (A) from 0 to 20 and Power (W) from 0 to 550.

Temperature Characteristics	
Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (Isc)	+0.048%
Temperature Coefficient (Voc)	-0.26%
Temperature Coefficient (Pmax)	-0.34%


Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A

30


210 P-type Monofacial Module (60)



Power Range
595W ~ 605W



Power Output Tolerance
0W ~ +5W




Maximum Efficiency
21.38%

Structure Performance	
Solar Cell Type	210mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	2172×1303×35mm
Weight	31.2kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 200mm (-) , landscape 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs
Per Container(40'HQ)	558pcs


(Unit: mm)

Technical drawing of the 210 P-type Monofacial Module (60) showing dimensions and a cross-section A-A & B-B. The module is rectangular with a width of 1303mm and a height of 2172mm. The frame width is 35mm. The mounting slots are 8-9x14mm. The junction box is located at the bottom center. The cross-section A-A & B-B shows the module's profile with a height of 35mm and a width of 33mm.


210 P-type Monofacial Module (66)



Power Range
655W ~ 665W



Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.41%

Structure Performance	
Solar Cell Type	210mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	132pcs(6×22)
Module Dimension	2384×1303×35mm
Weight	33.8kg
Front Glass	3.2mm, highly transparent tempered glass with anti-reflective coating
Back Sheet	White
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+) , landscape 1400mm (+) 200mm (-) , landscape 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs
Per Container(40'HQ)	558pcs

(Unit: mm)

Technical drawing of the 210 P-type Monofacial Module (66) showing dimensions and a cross-section A-A & B-B. The module is rectangular with a width of 1303mm and a height of 2384mm. The frame width is 35mm. The mounting slots are 8-9x14mm. The junction box is located at the bottom center. The cross-section A-A & B-B shows the module's profile with a height of 35mm and a width of 33mm.

Electrical Performance Parameters							
Model Type	595D(HPM)60(210)		600D(HPM)60(210)		605D(HPM)60(210)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	595	451	600	454	605	458
Max. Power Voltage	V _{MPP} (V)	34.10	31.92	34.29	32.02	34.49	32.21
Max. Power Current	I _{MPP} (A)	17.45	14.13	17.50	14.18	17.54	14.22
Open Circuit Voltage	V _{OC} (V)	41.14	38.90	41.34	39.10	41.54	39.30
Short Circuit Current	I _{SC} (A)	18.44	14.89	18.48	14.93	18.56	14.97
Module Efficiency	(%)	21.02		21.20		21.38	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Electrical Performance Parameters							
Model Type	655D(HPM)66(210)		660D(HPM)66(210)		665D(HPM)66(210)		
Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	
Nominal Max. Power	P _{MAX} (W)	655	496	660	500	665	504
Max. Power Voltage	V _{MPP} (V)	37.69	35.04	37.89	35.28	38.09	35.48
Max. Power Current	I _{MPP} (A)	17.38	14.13	17.42	14.18	17.46	14.21
Open Circuit Voltage	V _{OC} (V)	45.74	42.90	45.94	43.10	46.14	43.20
Short Circuit Current	I _{SC} (A)	18.46	14.90	18.50	14.94	18.54	14.98
Module Efficiency	(%)	21.09		21.25		21.41	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (605D)

Current-Voltage & Power-Voltage Curve (605D) graph showing Current (A) and Power (W) vs Voltage (V) for various irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The graph shows that as irradiance increases, the current and power also increase. The power curve peaks at approximately 40V and 600W for 1000W/m² irradiance.

Temperature Characteristics	
Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{SC})	+0.048%
Temperature Coefficient (V _{OC})	-0.26%
Temperature Coefficient (P _{MAX})	-0.34%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A

Current-Voltage & Power-Voltage Curve (665D)

Current-Voltage & Power-Voltage Curve (665D) graph showing Current (A) and Power (W) vs Voltage (V) for various irradiance levels (1000W/m², 800W/m², 600W/m², 400W/m², 200W/m²). The graph shows that as irradiance increases, the current and power also increase. The power curve peaks at approximately 40V and 600W for 1000W/m² irradiance.

Temperature Characteristics	
Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (I _{SC})	+0.048%
Temperature Coefficient (V _{OC})	-0.26%
Temperature Coefficient (P _{MAX})	-0.34%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A

31

210 P-type Bifacial Module (54)



Power Range
535W ~ 545W




Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.34%


Structure Performance	
Solar Cell Type	210mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	108pcs(6×18)
Module Dimension	1960×1303×35mm
Weight	32.8kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm ² , portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs
Per Container(40'HQ)	558pcs

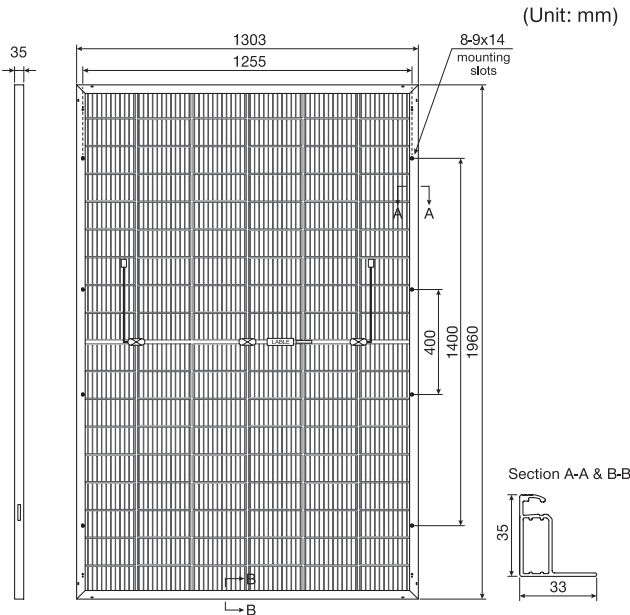

Electrical Performance Parameters							
Model Type		535D(HBD)54(210)		540D(HBD)54(210)		545D(HBD)54(210)	
Testing Condition		STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{max} (W)	535	406	540	410	545	414
Max. Power Voltage	V _{mp} (V)	30.83	28.84	31.03	29.04	31.23	29.24
Max. Power Current	I _{mp} (A)	17.36	14.08	17.41	14.12	17.46	14.16
Open Circuit Voltage	V _{oc} (V)	37.40	35.00	37.60	35.20	37.80	35.40
Short Circuit Current	I _{sc} (A)	18.28	14.76	18.32	14.80	18.34	14.84
Module Efficiency	(%)	20.95		21.14		21.34	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (545D)

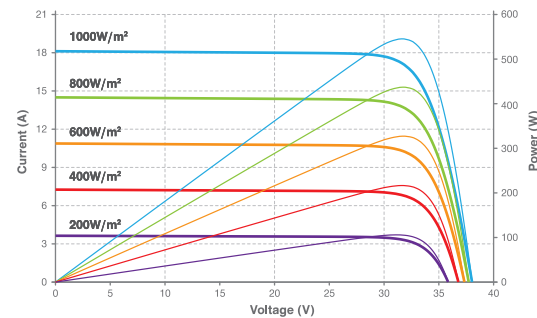

Bifacial Output-rearside Power Gain					
5%	Maximum Power	P _{MAX} (W)	562	567	572
	Module Efficiency	(%)	22.00	22.20	22.41
10%	Maximum Power	P _{MAX} (W)	589	594	600
	Module Efficiency	(%)	23.04	23.26	23.47
25%	Maximum Power	P _{MAX} (W)	669	675	681
	Module Efficiency	(%)	26.19	26.43	26.68

Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{OC})	-0.26%
Temperature Coefficient (I _{SC})	+0.048%	Temperature Coefficient (P _{MAX})	-0.34%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A

210 P-type Bifacial Module (60)



Power Range
595W ~ 605W




Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.38%


Structure Performance	
Solar Cell Type	210mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	120pcs(6×20)
Module Dimension	2172×1303×35mm
Weight	35.6kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm ² , portrait 400mm (+) 200mm (-) , landscape 1400mm (+) 1400mm (-) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs
Per Container(40'HQ)	558pcs

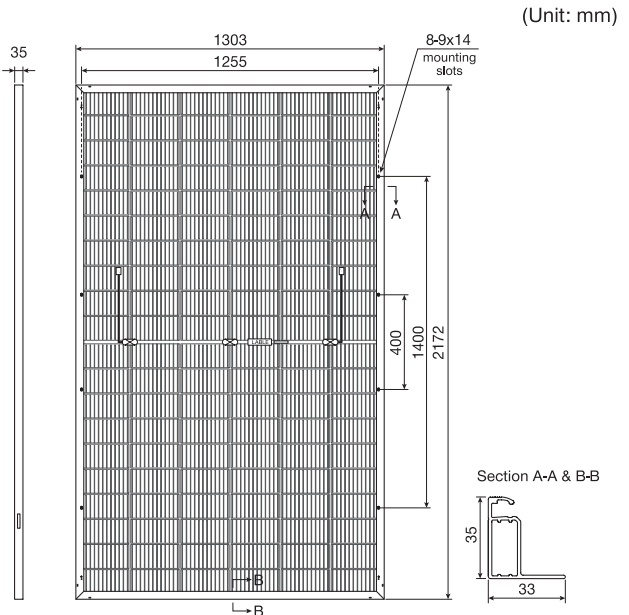

Electrical Performance Parameters							
Model Type		595D(HBD)60(210)		600D(HBD)60(210)		605D(HBD)60(210)	
Testing Condition		STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P _{max} (W)	595	451	600	455	605	459
Max. Power Voltage	V _{mp} (V)	34.33	32.01	34.53	32.21	34.73	32.40
Max. Power Current	I _{mp} (A)	17.34	14.09	17.38	14.13	17.43	14.17
Open Circuit Voltage	V _{oc} (V)	41.60	39.20	41.80	39.40	42.00	39.60
Short Circuit Current	I _{sc} (A)	18.33	14.79	18.37	14.83	18.41	14.87
Module Efficiency	(%)	21.02		21.20		21.38	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (605D)

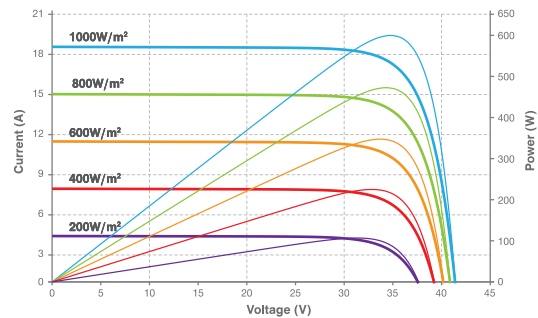


Bifacial Output-rearside Power Gain					
5%	Maximum Power	P _{MAX} (W)	625	630	635
	Module Efficiency	(%)	22.08	22.26	22.45
10%	Maximum Power	P _{MAX} (W)	655	660	666
	Module Efficiency	(%)	23.13	23.32	23.51
25%	Maximum Power	P _{MAX} (W)	744	750	756
	Module Efficiency	(%)	26.28	26.50	26.72

Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V _{OC})	-0.26%
Temperature Coefficient (I _{SC})	+0.048%	Temperature Coefficient (P _{MAX})	-0.34%

Maximum Parameters	
Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A

210 P-type Bifacial Module (66)



Power Range
655W ~ 665W




Power Output Tolerance
0W ~ +5W



Maximum Efficiency
21.41%


Structure Performance	
Solar Cell Type	210mm Mono-crystalline (Half Cell)
Solar Cell Arrangement	132pcs(6x22)
Module Dimension	2384×1303×35mm
Weight	38.2kg
Front Glass	2.0mm, highly transparent tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm², portrait 400mm (+), landscape 1400mm (+) Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	MC4 Compatible
Per Pallet	31pcs
Per Container(40'HQ)	558pcs

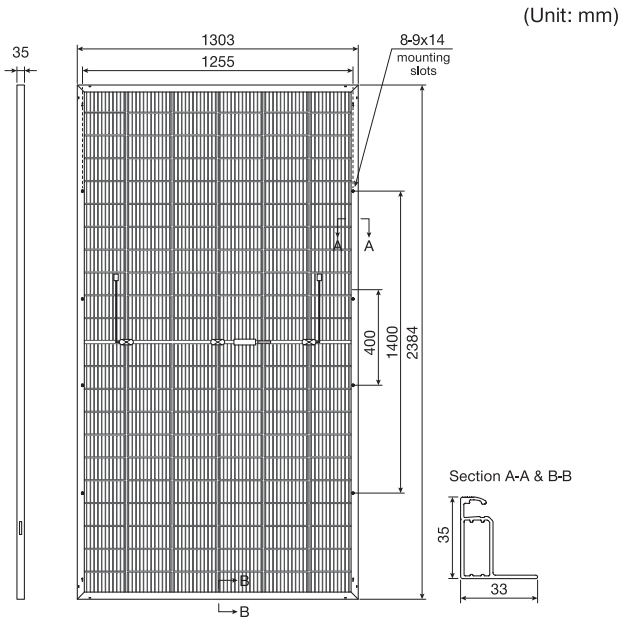

Electrical Performance Parameters							
Model Type		655D(HBD)66(210)		660D(HBD)66(210)		665D(HBD)66(210)	
Testing Condition		STC	NMOT	STC	NMOT	STC	NMOT
Nominal Max. Power	P_{MAX} (W)	655	496	660	500	665	504
Max. Power Voltage	V_{MP} (V)	37.83	35.22	38.03	35.42	38.23	35.62
Max. Power Current	I_{MP} (A)	17.32	14.08	17.36	14.12	17.40	14.16
Open Circuit Voltage	V_{OC} (V)	45.80	43.20	46.00	43.40	46.20	43.60
Short Circuit Current	I_{SC} (A)	18.38	14.82	18.42	14.86	18.46	14.90
Module Efficiency	(%)	21.09		21.25		21.41	

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5; NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s; Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (665D)

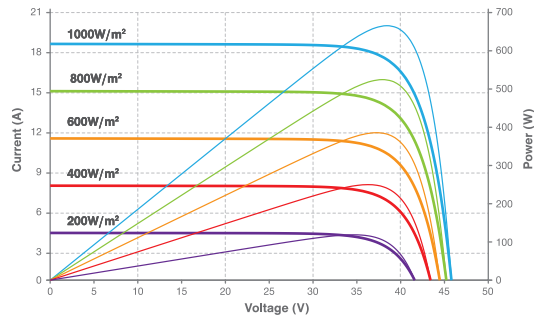

Bifacial Output-rearside Power Gain					
5%	Maximum Power	P_{MAX} (W)	688	693	698
	Module Efficiency	(%)	22.14	22.31	22.48
10%	Maximum Power	P_{MAX} (W)	721	726	732
	Module Efficiency	(%)	23.19	23.37	23.55
25%	Maximum Power	P_{MAX} (W)	819	825	831
	Module Efficiency	(%)	26.36	26.56	26.76

Temperature Characteristics			
Nominal Module Operating Temperature	44±2°C	Temperature Coefficient (V_{OC})	-0.26%
Temperature Coefficient (I_{SC})	+0.048%	Temperature Coefficient (P_{MAX})	-0.34%

Maximum Parameters	
Working Temperature	-40 ~ +85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A



Project Highlights

Businesses can use the free electricity generated from Solar power stations directly, reducing consumption of electricity from the power grid, thereby enjoying immense savings on their electrical bill. If applicable, a Solar power station can even be connected to the power grid, allowing businesses to sell excess electricity to the grid to generate additional profit.



Karamay Desert Solar Power Station (Phase I)

Location: Karamay, Xinjiang, China

Project Capacity
600MW



New Community Concentrated Solar Power Generation System

Location: Saraburi Province, Thailand

Project Capacity
1MW



Rooftop Power Station Built in Indonesia's New Capital

Location: Kalimantan, Indonesia


Project Capacity
1MW



Snowflake Ice Factory Solar Power Station

Location: Phnom Penh, Cambodia

Project Capacity
500KW

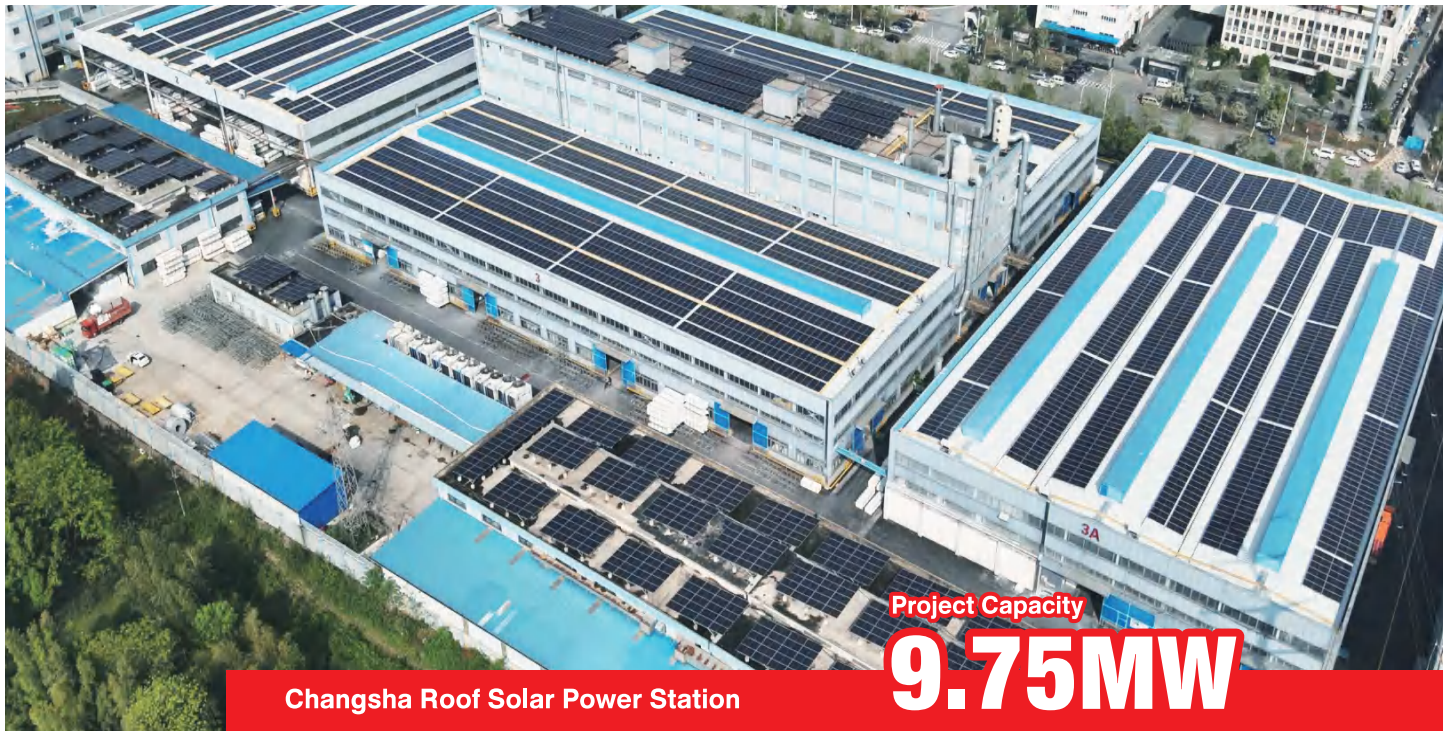

Changsha Roof Solar Power Station

Location: Changsha, Hunan, China

Project Capacity
9.75MW



Solar Pumping Power Station

Location: Egypt

Project Capacity
275KW



Maoming Logistics Roof Solar Power Station

Location: Maoming, Guangdong, China

Project Capacity
6.58MW



Haitian Roof Solar Power Station

Location: Foshan, Guangdong, China

Project Capacity
6.14MW



Ducheng Roof Solar Power Station

Location: Yunan, Guangdong, China

Project Capacity: 5MW



Hongyu Logistics Park Roof Solar Power Station

Location: Guangdong, China

Project Capacity: 4.5MW



Dingnan Roof Solar Power Station

Location: Dingnan, Hainan, China

Project Capacity
6MW



Huanghuai market Roof Solar Power Station

Location: Henan, China

Project Capacity: 4.35MW



Qianlie Cable Factory Rooftop Solar Power Station

Location: Yunnan, China

Project Capacity: 4MW

BUILDING A SOLAR-POWERED WORLD



For the latest information, please mail to info@sanopower.com, thank you!